



PREMIUM-WERKZEUGE



PREMIUM TOOLS



[www.kstools.com](http://www.kstools.com)

**PRECISION  
TOOLS**

## MAGNETIC LIFTER

### 2in1 telescopic magnetic holder with washing nozzle cleaning and adjustment tool

- Load capacity to 0.5 kg
- With telescopic function
- Practical service tool
- With sturdy, scriber-like centre
- With narrow cleaning rod
- Ideally suited to the cleaning and adjustment of windscreen washer nozzles
- Also suited to the adjustment of headlight washer nozzles
- With mounting clip for breast pocket
- Includes protective covers
- Aluminium



	Head Ø mm	Length mm	g	€
<b>550.1001</b>	8,0	150,0 - 675,0	25	<b>5,90</b>

### Telescopic magnetic lifter

- Load capacity to 1.5 kg
- Magnet power raised 35% due to energy safety cap
- Stainless steel



	Head Ø mm	Length mm	g	€
<b>550.1004</b>	13,0	178,0 - 675,0	70	<b>16,50</b>

### Telescopic magnetic lifter

- Load capacity to 1.5 kg
- With telescopic function
- Magnet power raised 35% due to energy safety cap
- Stainless steel



	Head Ø mm	Length mm	g	€
<b>550.1002</b>	18,0	178,0 - 665,0	80	<b>17,50</b>

### Telescopic magnetic lifter

- Load capacity to 2 kg
- With telescopic function
- Clip for the breast pocket
- Special tool steel



	Head Ø mm	Length mm	g	€
<b>550.1000</b>	13,0	130,0 - 630,0	30	<b>11,90</b>

## Telescopic magnetic lifter


- Load capacity to 5 kg
- With rotary head
- With telescopic function
- Magnet power raised 35% due to energy safety cap
- Stainless steel



	Head Ø mm	Length mm	g	€
<b>550.1003</b>	18,0	200,0 - 700,0	90	<b>18,50</b>

## Flexible magnetic holder

- Load capacity to 200 g
- Flexible shaft
- 4 mm with a very thin magnetic seat
- One component handle

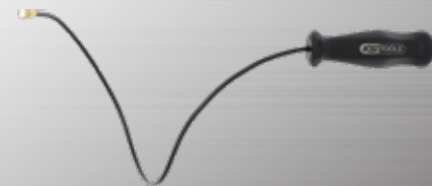

	Length mm	g	€
<b>550.1032</b>	400,0	20	<b>6,50</b>

## Flexible magnet lifter

- Load capacity to 2 kg
- Detachable inner cover
- Magnet power raised 35% due to energy safety cap
- Special tool steel



	Head Ø mm	Length mm	g	€
<b>550.1010</b>	10,0	585,0	130	<b>49,50</b>



## 2in1 telescopic magnetic jack with washing nozzle cleaning and adjustment tool

- Load capacity to 2.5 kg
- With telescopic function
- With flexible magnetic head
- Practical service tool
- With sturdy, scriber-like centre
- With narrow cleaning rod
- Ideally suited to the cleaning and adjustment of windscreen washer nozzles
- Also suited to the adjustment of headlight washer nozzles
- With mounting clip for breast pocket
- Includes protective covers
- Aluminium



	Head Ø mm	Length mm	g	€
<b>550.1023</b>	11,0	150,0 - 590,0	60	<b>7,90</b>



## Flexible magnet lifter

- Flexible shaft
- Two component handle
- Special tool steel



	Load capacity kg	Head Ø mm	Length mm	g	€
<b>550.1025</b>	1	13,0	510,0	185	<b>10,90</b>
<b>550.1026</b>	2	16,0	510,0	200	<b>11,90</b>
<b>550.1027</b>	3	19,0	510,0	200	<b>12,90</b>

## CLAW GRIP

### Flexible pick up tool

- Flexible
- Circular diameter max. 20.0 mm
- Stainless steel



	Ø mm	Length mm	g	€
<b>550.1301</b>	20	600,0	150	<b>9,90</b>

## INSPECTION MIRRORS WITHOUT ILLUMINATION

### Search mirror with protective insulation


- Insulated handle to IEC 60900
- Insulated
- Chrome vanadium



	Ø mm	Length mm			€
117.1630	21	175,0	1000V	20	52,50

### Mechanics mirror

- For visual monitoring and troubleshooting
- Ideal for difficult to access areas
- Special tool steel

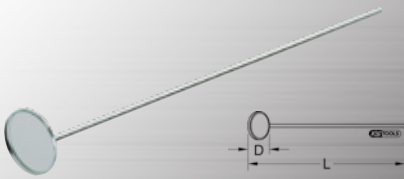

	D mm	L mm		€
118.0086	12,0	130,0	4	21,50
118.0087	21,0	130,0	9	21,50
118.0088	27,0	130,0	16	21,50

### Telescopic magnifying glass

- With telescopic function
- Single ball joint
- 360° revolving
- Impact proof acrylic glass
- Special tool steel



	Width mm	Height mm	Length mm		€
550.1009	44,0	63,5	178,0 - 660,0	50	28,90

### Telescopic mechanics mirror

- With telescopic function
- For visual monitoring and troubleshooting
- Double ball joint
- Head swiveling in all directions
- Clip for the breast pocket
- Ideal for difficult to access areas
- Special tool steel



	D mm	L mm		€
550.1030	32,0	178 - 530	40	8,50

### Telescopic inspection mirror

- With telescopic function
- For visual monitoring and troubleshooting
- Single ball joint
- Head swivels in all directions
- Impact resistant mirror
- Stainless steel



	Width mm	Height mm	Length mm		€
550.1007	45,0	63,0	178,0 - 675,0	100	16,50

### Telescopic inspection mirror


- With telescopic function
- For visual monitoring and troubleshooting
- Single ball joint
- Mirror out of stainless steel with plate-glass
- Stainless steel



	Width mm	Height mm	Length mm		€
550.1019	57,0	63,0	178,0 - 630,0	100	40,90

### Telescopic inspection mirror


- With telescopic function
- For visual monitoring and troubleshooting
- Single ball joint
- Stainless steel mirror

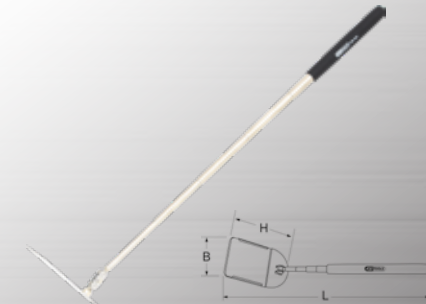

	Width mm	Height mm	Length mm		€
550.1021	57,0	95,0	195,0 - 685,0	100	16,50

### Magnetic welding mirrors


- Mirror chrome
- Flexible arm
- Special tool steel

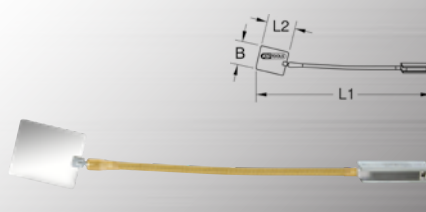

	B mm	L1 mm	L2 mm		€
903.6000	70,0	500,0	80,0	470	32,50

### Flexible inspection mirror

- Flexible arm
- adjustable by pressing the button
- Special tool steel

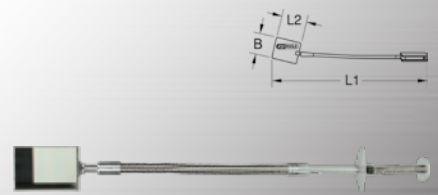

	B mm	L1 mm	L2 mm		€
500.7823	45,0	495,0	70,0	225	48,50

### Telescopic set

- With telescopic function
- Telescopic-Magnet up to 1.5 kg
- Magnet power raised 35% due to energy safety cap
- Telescopic-Inspection mirror, 45.0 x 63.0 mm
- Length 178,0-860,0 mm
- Special tool steel
- In durable plastic storage case



		€	
550.1102	2 pcs Telescopic set	280	35,50


consists of:

		€	
550.1007	Telescopic inspection mirror, 178-675mm, 45x63mm	100	
550.1002	Telescopic magnetic lifter Øhead=18mm, 178-665mm	80	

## INSPECTION MIRROR WITH LIGHTING

### Flexible inspection mirror with lighting

- Ideal for very long network independent working
- LED light source
- For visual monitoring and troubleshooting
- Double ball joint
- Approx. 60 hours lamp duration
- 1 x CR2032 battery included
- Impact proof housing

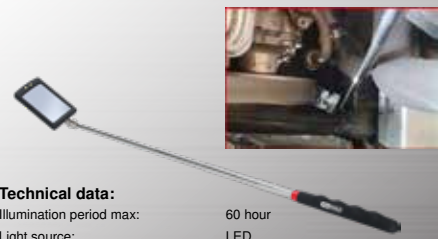

#### Technical data:

Illumination period max: 60 hour  
Light source: LED


	Length mm	Width mm	Height mm		€
550.1136	285,0 - 875,0	50,0	80,0	85	9,90



## HOOK TOOLS

### Hook, 90° short, 180° short

- Ideal for removing and use of O rings and seals
- Special tool steel



	g	€
<b>550.1041</b> Hook, 90° short, 180° short	11	3,90

### Hook, 45° long, 90° long

- Ideal for removing and use of O rings and seals
- Special tool steel



	g	€
<b>550.1042</b> Hook, 45° long, 90° long	11	3,50

### Hook tool set

- Ideal for removing and use of O rings and seals
- Special tool steel



	g	€
<b>550.1040</b> 2 pcs Hook tool set	30	8,50

consists of:

	g	€
<b>550.1041</b> Hook, 90° short, 180° short bent	11	
<b>550.1042</b> Hook, 45° long, 90° long	11	

### Magnet and hook tool set

- Ideal for removing and use of O rings and seals
- With telescopic magnet attachment and replaceable hook
- Storage compartment in the handle for the various attachments
- Special tool steel



	g	€
<b>550.1080</b> 6 pcs Magnet and hook tool set	70	21,50

consists of:

	g	€
<b>550.1081</b> Basic unit	35	
<b>550.1082</b> Telescopic magnet attachment, 90-390 mm	13	
<b>550.1083</b> Hook attachment, straight, 75 mm	5	
<b>550.1084</b> Hook attachment, 90°, 75 mm	5	
<b>550.1085</b> Hook attachment, 120°, 75 mm	5	
<b>550.1086</b> Hook attachment, lateral bend, 75 mm	5	

### Hook, straight

- Ideal for removing and use of O rings and seals
- Two component handle
- Special tool steel



	g	€
<b>550.1046</b> 60,0	27	3,50

### Hook, 45°

- Ideal for removing and use of O rings and seals
- Two component handle
- Special tool steel



	g	€
<b>550.1047</b> 60,0	27	3,50

### Hook, 90°

- Ideal for removing and use of O rings and seals
- Two component handle
- Special tool steel



	g	€
<b>550.1048</b> 60,0	27	3,50

### Hook, 135°

- Ideal for removing and use of O rings and seals
- Two component handle
- Special tool steel



	g	€
<b>550.1049</b> 60,0	27	4,50

### Hook, straight

- Ideal for removing and use of O rings and seals
- Two component handle
- Special tool steel



	g	€
<b>550.1071</b> 215,0	91	6,50

### Hook, 90°

- Ideal for removing and use of O rings and seals
- Two component handle
- Special tool steel



	g	€
<b>550.1072</b> 240,0	105	6,50

### Hook, sickle

- Ideal for removing and use of O rings and seals
- Two component handle
- Special tool steel



	g	€
<b>550.1073</b> 185,0	88	6,50

### Hook tool set

- Ideal for removing and use of O rings and seals
- Two component handle
- Special tool steel



	g	€
<b>550.1045</b> 4 pcs Hook tool set	120	9,90

consists of:

	g	€
<b>550.1046</b> Hook, straight	27	
<b>550.1047</b> Hook, 45° offset	27	
<b>550.1048</b> Hook, 90° offset	27	
<b>550.1049</b> Hook, 135° bent	27	

## Master hook tool set

- Ideal for removing and use of O rings and seals
- Special tool steel




550.1070	9 pcs	Master hook tool set	680	19,90
----------	-------	----------------------	-----	-------

consists of:

550.1046	Hook, straight	27
550.1047	Hook, 45° offset	27
550.1048	Hook, 90° offset	27
550.1049	Hook, 135° bent	27
550.1071	Hook, large, straight	91
550.1072	Hook, large, 90° bent	105
550.1073	Hook, large, sickle	88
550.1074	T hook, S form small, 120mm	42
550.1075	T hook, S form large, 165mm	96

## Gasket ring dismantling tool

- sickle-shaped
- For the removal of washers
- Long durability through hardened leverage
- Universal usage
- Two component handle
- Burnished
- Chrome vanadium



550.1060	L1 mm	L2 mm	L3 mm	D mm	€
	300,0	195,0	85,0	12,0	20,50



## PH00 - PH0 - PH1 - PH2



## 1,5 - 2 - 2,5 - 3 - 3,5 mm



## 1 - 1,3 - 1,5 - 2 - 2,5 - 3 mm



## T3 - T4 - T5 - T6 - T7



4 mm

## PRECISION SCREWDRIVER

### Electric rechargeable precision screwdriver

- Ideal for very long network independent working
- Lightweight
- With practical clockwise and anticlockwise reversing function
- High performance lithium-ion battery
- Fast charging function (0,5 - 1 hour)
- Micro-USB charging connector on the side
- With charge display
- Ultra light Aluminium housing
- Supplied with an extensive selection of bits



### Technical data:


Operating time :	5 - 6 h
Torque max.	3 Nm
Charging time:	1 hour
Battery technology:	Lithium-ion
Battery capacity:	0,26 Ah
Battery voltage:	3,7 V

500.7195	Electric rechargeable precision screwdriver	230	42,90
----------	---	-----	-------

6 x		1,0 - 1,3 - 1,5 - 2,0 - 2,5 - 3,0 mm
5 x		1,5 - 2,0 - 2,5 - 3,0 - 3,5 mm
4 x		PH00 - PH0 - PH1 - PH2
5 x		T3 - T4 - T5 - T6 - T7

### Precision screwdriver for slotted screws

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



	D mm	D	L1 mm	L2 mm	L3 mm	€	
500.7701	0,8		145,0	50,0	95,0	10	2,50
500.7141	1,0		145,0	50,0	95,0	10	2,50
500.7702	1,2		145,0	50,0	95,0	10	2,50
500.7108	1,4		145,0	50,0	95,0	10	2,90
500.7756	1,8		145,0	50,0	95,0	12	2,50
500.7109	2,0		145,0	50,0	95,0	15	2,90
500.7759	2,0		195,0	100,0	95,0	15	2,50
500.7110	2,4		145,0	50,0	95,0	20	2,90
500.7762	2,4		195,0	100,0	95,0	25	2,50
500.7111	3,0		145,0	50,0	95,0	20	2,90
500.7763	3,0		195,0	100,0	95,0	25	2,50
500.7764	3,0		245,0	150,0	95,0	32	3,50
500.7713	3,5		145,0	50,0	95,0	20	3,50
500.7142	4,0		145,0	50,0	95,0	20	2,50
500.7765	4,0		195,0	100,0	95,0	25	2,50
500.7766	4,0		245,0	150,0	95,0	32	3,50
500.7144		1/16"	145,0	50,0	95,0	10	2,50
500.7145		3/32"	145,0	50,0	95,0	10	2,50
500.7146		9/64"	145,0	50,0	95,0	20	2,50

### Precision screwdriver for phillips screws PH

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		Ø mm	L1 mm	L2 mm	L3 mm	g	€
500.7126	PH 000	1,6	145,0	50,0	95,0	10	2,50
500.7106	PH 00	2,0	145,0	50,0	95,0	15	2,90
500.7831	PH 00	2,0	170,0	75,0	95,0	23	2,90
500.7107	PH 0	2,4	145,0	50,0	95,0	20	2,50
500.7128	PH 1	3,5	145,0	50,0	95,0	20	2,50
500.7125	PH 1	3,5	145,0	50,0	95,0	20	2,50
500.7129	PH 1	4,0	145,0	50,0	95,0	20	2,50
500.7833	PH 1	4,0	170,0	75,0	95,0	18	2,90
500.7834	PH 1	4,0	245,0	150,0	95,0	35	3,50

### Precision screwdriver for Torx tamperproof screws


- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm	g	€
500.7151	TB7	145,0	50,0	95,0	20	2,50
500.7152	TB8	145,0	50,0	95,0	20	2,50
500.7153	TB9	145,0	50,0	95,0	20	2,50
500.7154	TB10	145,0	50,0	95,0	20	2,50
500.7155	TB15	145,0	50,0	95,0	25	2,50
500.7730	TB20	145,0	50,0	95,0	18	2,50

### Precision screwdriver for hexagon screws

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

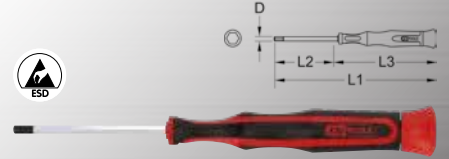

	D mm	D	L1 mm	L2 mm	L3 mm	g	€
500.7721	0,7		145,0	50,0	95,0	10	2,50
500.7722	0,9		145,0	50,0	95,0	10	2,50
500.7723	1,3		145,0	50,0	95,0	10	2,50
500.7119	1,5		145,0	50,0	95,0	10	2,50
500.7120	2,0		145,0	50,0	95,0	10	2,50
500.7121	2,5		145,0	50,0	95,0	15	2,50
500.7122	3,0		145,0	50,0	95,0	20	2,50
500.7123	3,5		145,0	50,0	95,0	20	2,50
500.7718	0,05"		145,0	50,0	95,0	15	2,50
500.7147	1/16"		145,0	50,0	95,0	10	2,50
500.7724	5/64"		145,0	50,0	95,0	10	2,50
500.7148	3/32"		145,0	50,0	95,0	15	2,50
500.7725	7/64"		145,0	50,0	95,0	15	2,50
500.7149	1/8"		145,0	50,0	95,0	20	2,50

### Precision screwdriver for pozdriv screws PZ

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		Ø mm	L1 mm	L2 mm	L3 mm	g	€
500.7156	PZ 0	3,0	145,0	50,0	95,0	15	2,50
500.7157	PZ 1	4,0	145,0	50,0	95,0	15	2,50

### Precision screwdriver for Torx-PLUS screws


- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm	g	€
500.7806	IP1	145,0	50,0	95,0	10	2,50
500.7807	IP2	145,0	50,0	95,0	10	2,50
500.7813	IP4	145,0	50,0	95,0	20	2,50
500.7814	IP5	145,0	50,0	95,0	10	2,50
500.7815	IP6	145,0	50,0	95,0	20	2,50
500.7816	IP7	145,0	50,0	95,0	20	2,50
500.7817	IP8	145,0	50,0	95,0	20	2,50
500.7818	IP9	145,0	50,0	95,0	20	2,50
500.7819	IP10	145,0	50,0	95,0	20	2,50
500.7821	IP15	145,0	50,0	95,0	20	2,50
500.7822	IP20	145,0	50,0	95,0	20	2,50

### Precision mechanic screwdriver for hexagon socket screws - with ball head

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

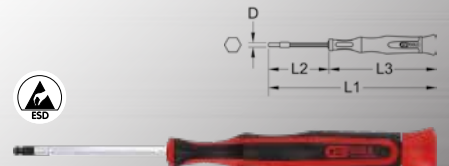

	D mm	D	L1 mm	L2 mm	L3 mm	g	€
500.7779	1,3		145,0	50,0	95,0	14	2,50
500.7785	1,5		145,0	50,0	95,0	14	2,90
500.7786	2,0		145,0	50,0	95,0	15	2,90
500.7787	2,5		145,0	50,0	95,0	17	2,90
500.7788	3,0		145,0	50,0	95,0	19	2,90
500.7789	1/16"		145,0	50,0	95,0	14	2,50
500.7791	5/64"		145,0	50,0	95,0	15	2,50
500.7792	3/32"		145,0	50,0	95,0	16	2,50
500.7793	7/64"		145,0	50,0	95,0	19	2,50
500.7794	1/8"		145,0	50,0	95,0	19	2,50
500.7795	9/64"		145,0	50,0	95,0	20	2,50
500.7796	5/32"		145,0	50,0	95,0	20	2,50

### Precision screwdriver for Torx screws

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm	g	€
500.7726	T1	145,0	50,0	95,0	15	2,50
500.7727	T2	145,0	50,0	95,0	15	2,50
500.7728	T3	145,0	50,0	95,0	15	2,50
500.7729	T4	145,0	50,0	95,0	15	2,50
500.7140	T5	145,0	50,0	95,0	10	2,50
500.7112	T6	145,0	50,0	95,0	10	2,90
500.7113	T7	145,0	50,0	95,0	15	2,50
500.7114	T8	145,0	50,0	95,0	20	2,50
500.7115	T9	145,0	50,0	95,0	20	2,90
500.7116	T10	145,0	50,0	95,0	20	2,50
500.7117	T15	145,0	50,0	95,0	25	2,50
500.7124	T20	145,0	50,0	95,0	25	2,50

### Precision screwdriver for Torx-PLUS screws with bore


- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm	g	€
500.7808	IPR3	145,0	50,0	95,0	10	2,50
500.7809	IPR4	145,0	50,0	95,0	10	2,50
500.7811	IPR5	145,0	50,0	95,0	10	2,50
500.7812	IPR6	145,0	50,0	95,0	10	2,50

### Precision screwdriver for external hexagon screws

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Blades made from special steel

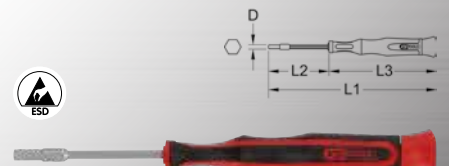

	D mm	D	L1 mm	L2 mm	L3 mm	g	€
500.7731	1,5		165,0	75,0	90,0	10	2,90
500.7767	1,8		165,0	75,0	90,0	10	2,90
500.7130	2,0		165,0	75,0	90,0	10	2,90
500.7131	2,5		165,0	75,0	90,0	10	2,90

	D mm	D	L1 mm	L2 mm	L3 mm	g	€
500.7132	3,0		165,0	75,0	90,0	15	2,90
500.7133	3,2		165,0	75,0	90,0	30	2,90
500.7134	3,5		165,0	75,0	90,0	30	2,90
500.7135	4,0		165,0	75,0	90,0	30	2,90
500.7733	4,5		165,0	75,0	90,0	22	2,90
500.7734	5,0		165,0	75,0	90,0	22	2,90
500.7735	5,5		165,0	75,0	90,0	25	2,90
500.7768	6,0		165,0	75,0	90,0	30	3,50
500.7769	7,0		165,0	75,0	90,0	30	3,50
500.7136		3/32"	165,0	75,0	90,0	20	2,90
500.7137		7/64"	165,0	75,0	90,0	20	2,90
500.7738		1/8"	165,0	75,0	90,0	22	2,90
500.7138		9/64"	165,0	75,0	90,0	30	2,90
500.7771		5/32"	165,0	75,0	90,0	20	2,90
500.7139		11/64"	165,0	75,0	90,0	30	2,90
500.7772		3/16"	165,0	75,0	90,0	20	2,90
500.7773		7/32"	165,0	75,0	90,0	20	3,50
500.7774		1/4"	165,0	75,0	90,0	20	3,50

## PRECISION SCREWDRIVER SETS

### Precision screwdriver set Torx

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium
- In durable ABS storage case



	g	€
500.7160 7 pcs Precision screwdriver set Torx	100	19,50
7 x  T6 - T7 - T8 - T9 - T10 - T15 - T20		

### Precision screwdriver set PH and slotted

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium
- In durable ABS storage case



	g	€
500.7165 7 pcs Precision screwdriver set PH and slotted	100	19,50
3 x  PH00 - PH0 - PH1		
4 x  1,4 - 2,0 - 2,4 - 3,0 mm		

### Precision screwdriver set PH, slotted and Torx

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium
- In durable plastic storage case



	g	€
500.7170 14 pcs Precision screwdriver set PH, slotted and Torx	200	33,50
3 x  PH00 - PH0 - PH1		
4 x  1,4 - 2,0 - 2,4 - 3,0 mm		
7 x  T6 - T7 - T8 - T9 - T10 - T15 - T20		

### Precision screwdriver set

- Electrostatically protect
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Two component handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium
- In durable plastic storage case



	kg	€
500.7150 37 pcs Precision screwdriver set	1,80	85,50
6 x  PH000 - PH00 - PH0 x 3,0 - PH0 x 2,0 - PH1 x 3,5 - PH1 x 4,0		
7 x  1,0 - 2,0 - 3,0 - 4,0 mm - 1/16" - 3/32" - 9/64"		
2 x  T5 - T6		
7 x  1,5 - 2,0 - 2,5 - 3,0 - 1/16" - 3/32" - 1/8"		
10 x  2,0 - 2,5 - 3,0 - 3,2 - 3,5 - 4,0 - 3/32" - 7/64" - 9/64" - 1.1/64"		
5 x  TB7 - TB8 - TB9 - TB10 - TB15		

### Precision tool set

- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Induction-hardened precision cutting
- Self opening double spring
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Hardened blade
- Chrome finish with burnished surface
- Two component handle
- Black chrome
- Blades made from special steel



	g	€
500.7180 10 pcs Precision tool set	400	32,50
1 x  125 mm		
1 x  100 mm		
1 x  145 mm		
3 x  PH00 - PH0 - PH1		
4 x  1,4 - 2,0 - 2,4 - 3,0 mm		

### Precision tool set

- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Induction-hardened precision cutting
- Self opening double spring
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Hardened blade
- Chrome finish with burnished surface
- Two component handle
- Black chrome
- Blades made from special steel



	kg	€
500.7190 21 pcs Precision tool set	1,40	99,90
2 x  125 - 130 mm		
1 x  100 mm		
1 x  100 mm		
1 x  125 mm		
1 x  150 mm		
1 x  145 mm		
3 x  PH00 - PH0 - PH1		
4 x  1,4 - 2,0 - 2,4 - 3,0 mm		
7 x  T6 - T7 - T8 - T9 - T10 - T15 - T20		

## MAGNETIZERS AND DEMAGNETIZERS

### Magnetizer and demagnetizer

- Easy to use
- To magnetise by pulling the blade through
- To demagnetise by pulling the blade over the recess
- For screwdrivers, tweezers and similar tools made of steel
- Plastic housing




	B mm	H mm	L mm	g	€
550.1126	28,0	50,0	50,0	70	3,50

## PRECISION PLIERS

### Mounting clamp pliers


- 3 way adjustable locking
- Toothed gripping surfaces
- Anti glare - no annoying reflection
- Matt finish
- Stainless special steel

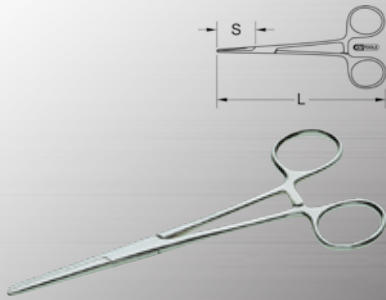

	L mm	S mm	g	€
500.7006	140,0	35,0	30	26,90
500.7007	160,0	40,0	40	26,90

### Precision long nosed pliers, curved


- Suitable for wire
- 45° curved jaws
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Black chrome
- Special tool steel

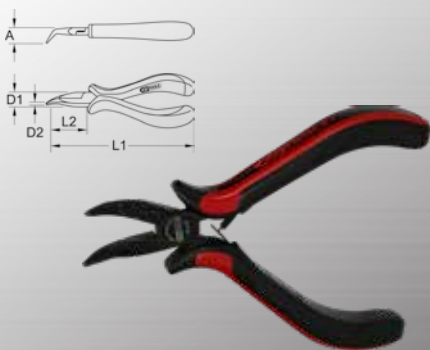

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7022	12,0	18,0	7,0	130,0	33,0	80	7,50

### Precision telephone pliers


- Suitable for wire
- Extra long jaws
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Black chrome
- Special tool steel

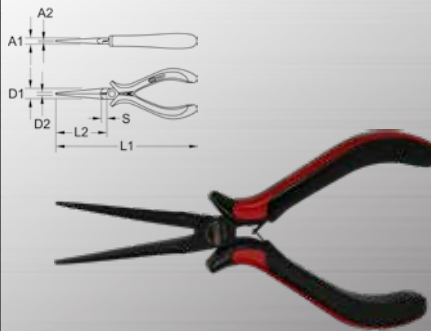

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g	€
500.7032	7,0	2,0	12,0	3,0	160,0	55,0	8,0	90	7,50

### Precision telephone pliers


- Suitable for wire
- Serrated execution
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Black chrome
- Special tool steel

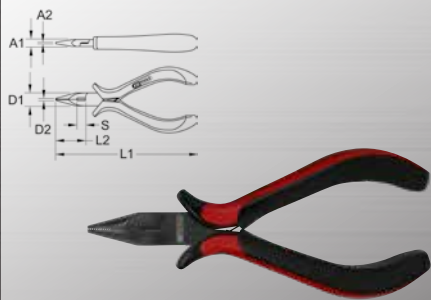

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g	€
500.7021	7,0	2,0	12,0	3,0	130,0	29,0	8,0	80	7,50

### Precision diagonal side cutter


- Suitable for wire
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Black chrome
- Special tool steel

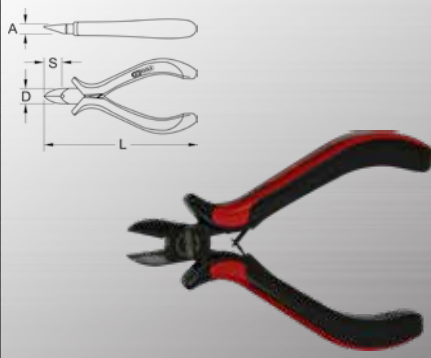

	A mm	D mm	L mm	S mm	g	€
500.7024	7,0	13,0	120,0	15,0	80	7,50

### Precision cutting pliers


- Suitable for wire
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Black chrome
- Special tool steel

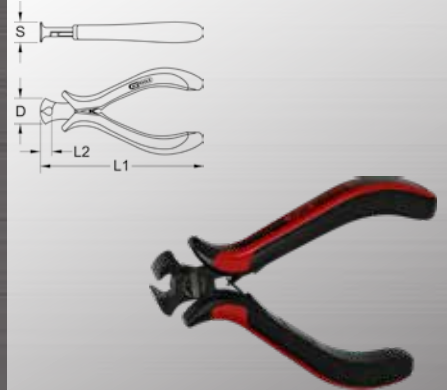

	D mm	L1 mm	L2 mm	S mm	g	€
500.7025	18,0	110,0	7,5	14,0	80	7,50

### Precision combination pliers


- Suitable for wire
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Black chrome
- Special tool steel

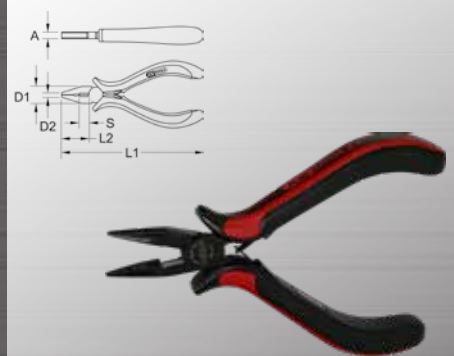

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g	€
500.7030	7,0	10,0	15,0	120,0	22,0	8,0	90	7,50

### Precision flat pliers

- Suitable for wire
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Black chrome
- Special tool steel

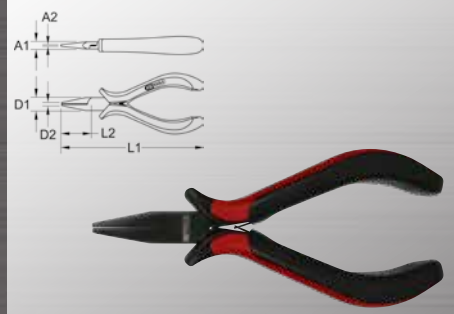

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7028	7,0	2,0	13,0	3,0	125,0	27,0	80	7,50



## PRECISION PLIER SETS

### Precision pliers set

- Suitable for wire
- Serrated execution
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Black chrome
- Special tool steel



			g	€
<b>500.7020</b>	5 pcs	Precision pliers set	420	<b>37,50</b>
1 x		130 mm		
1 x		120 mm		
1 x		110 mm		
1 x		120 mm		
1 x		160 mm		

### Precision tool set

- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Induction-hardened precision cutting
- Self opening double spring
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Hardened blade
- Chrome finish with burnished surface
- Two component handle
- Black chrome
- Blades made from special steel



			g	€
<b>500.7180</b>	10 pcs	Precision tool set	400	<b>32,50</b>
1 x		125 mm		
1 x		100 mm		
1 x		145 mm		
3 x		PH00 - PH0 - PH1		
4 x		1,4 - 2,0 - 2,4 - 3,0 mm		

### Precision tool set

- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Induction-hardened precision cutting
- Self opening double spring
- Twist end cap
- Ergonomically shaped electronic screwdriver handle
- Hardened blade
- Chrome finish with burnished surface
- Two component handle
- Black chrome
- Blades made from special steel




			g	€
<b>500.7190</b>	21 pcs	Precision tool set	1,40	<b>99,90</b>
2 x		125 - 130 mm		
1 x		100 mm		
1 x		100 mm		
1 x		125 mm		
1 x		150 mm		
1 x		145 mm		
3 x		PH00 - PH0 - PH1		
4 x		1,4 - 2,0 - 2,4 - 3,0 mm		
7 x		T6 - T7 - T8 - T9 - T10 - T15 - T20		



## ESD PRECISION PLIERS

### ESD long-nose pliers – straight – without cut


- Electrostatically protect
- Suitable for wire
- Short, straight jaws
- Without cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
<b>500.7064</b>	6,5	1,0	10,0	2,0	130,0	23,0	62	<b>40,90</b>

### ESD long-nose pliers – straight – with cut


- Electrostatically protect
- Suitable for wire
- Short, straight jaws
- With cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
<b>500.7065</b>	6,5	1,0	10,0	2,0	130,0	23,0	62	<b>40,90</b>

### ESD long-nose pliers – curved – without cut


- Electrostatically protect
- Suitable for wire
- Short, curved jaws
- Without cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
<b>500.7066</b>	10,0	10,0	2,0	130,0	20,0	62	<b>43,90</b>

## ESD long-nose pliers – curved – with cut


- Electrostatically protect
- Suitable for wire
- Short, curved jaws
- With cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7067	10,0	10,0	2,0	130,0	20,0	62	43,90

## ESD long-nose pliers – curved – without cut


- Electrostatically protect
- Suitable for wire
- Long, curved jaws
- Without cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7070	14,0	10,0	2,0	140,0	26,0	62	48,50
500.7073	20,0	12,5	2,4	155,0	33,0	93	49,50

## ESD flat pliers


- Electrostatically protect
- Suitable for wire
- Short jaws
- Without cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7075	6,5	3,5	10,0	1,5	130,0	22,0	61	40,90

## ESD long-nose pliers – straight – without cut


- Electrostatically protect
- Suitable for wire
- Long, straight jaws
- Without cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7068	6,5	1,0	10,0	2,0	140,0	32,0	68	43,90
500.7077	7,5	1,2	12,5	2,4	155,0	40,0	93	46,50

## ESD long-nose pliers – curved – with cut


- Electrostatically protect
- Suitable for wire
- Long, curved jaws
- With cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7071	14,0	10,0	2,0	140,0	26,0	68	48,50

## ESD round pliers


- Electrostatically protect
- Suitable for wire
- Short jaws
- Without cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7076	6,0	1,0	10,0	2,0	130,0	20,0	62	40,90

## ESD long-nose pliers – straight – with cut


- Electrostatically protect
- Suitable for wire
- Long, straight jaws
- With cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7069	6,5	1,0	10,0	2,0	140,0	32,0	68	43,90
500.7072	7,5	1,2	12,5	2,4	155,0	40,0	93	46,50

## ESD needle-nose pliers – straight – without cut


- Electrostatically protect
- Suitable for wire
- Very fine, long jaws
- Without cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7074	7,5	1,2	11,0	2,0	150,0	37,0	93	48,50

## ESD long-nose pliers – straight – without cut


- Electrostatically protect
- Suitable for wire
- Short, straight jaws
- Ultra-fine precision tips for extremely fine work
- Without cut
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7078	6,5	0,1	10,0	0,2	130,0	22,0	62	62,50

## ESD flat pliers


- Electrostatically protect
- Suitable for wire
- Long jaws
- Without cut
- Induction-hardened precision cutting, 61-63 HRC
- Self opening double spring
- Two component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7079	7,5	4,5	12,0	1,5	150,0	40,0	82	46,50

## ESD mini side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 0.8 mm/AWG 20
- Copper wire: 1.5 mm/AWG 15
- Short, pointed head with grooving
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7082	6,0	9,0	120,0	9,0	55	54,50

## ESD side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.4 mm/AWG 26
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Oval head with wire holder
- With control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7085	7,5	11,0	125,0	13,0	75	56,90

## ESD mini side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 0.8 mm/AWG 20
- Copper wire: 1.5 mm/AWG 15
- Small, oval head
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7080	6,0	9,0	120,0	9,0	55	51,50

## ESD side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.4 mm/AWG 26
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Oval head
- With control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7083	7,5	11,0	125,0	13,0	70	49,50

## ESD side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.3 mm/AWG 28
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Pointed head
- With control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7086	7,5	11,0	125,0	13,0	62	55,90

## ESD mini side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 0.8 mm/AWG 20
- Copper wire: 1.5 mm/AWG 15
- Small, pointed head
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7081	6,0	9,0	120,0	9,0	55	53,50

## ESD side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Oval head
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7084	7,5	11,0	125,0	13,0	70	49,50

## ESD side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Pointed head
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7087	7,5	11,0	125,0	13,0	62	50,50

## ESD side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.7 mm/AWG 21
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Oval, sturdy head
- With control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7088	9,0	14,5	135,0	20,0	105	53,50

## ESD carbide side cutters


- Electrostatically protect
- Suitable for wire
- Hard metal cutting edge in plier head for the highest cutting performance
- Induction-hardened precision cutting, 84-86 HRA
- Oval head
- With special control only for glass fibre (e.g. Kevlar)
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7091	7,5	11,0	125,0	10,0	62	160,50

## ESD mini angled cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.4 mm/AWG 26
- Medium wire: 1.0 mm/AWG 18
- Flexible wire: 1.2 mm/AWG 16
- Straight head for working in small spaces
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7094	6,5	10,0	120,0	12,0	64	64,50

## ESD side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 1.5 mm/AWG 15
- Copper wire: 2.0 mm/AWG 12
- Pointed, sturdy head
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7089	9,0	14,5	135,0	18,0	105	56,90

## ESD carbide side cutters


- Electrostatically protect
- Suitable for wire
- Hard metal cutting edge in plier head for the highest cutting performance
- Induction-hardened precision cutting, 84-86 HRA
- Piano wire: 0.4 mm/AWG 26
- Hard wire: 0.8 mm/AWG 20
- Flexible wire: 1.8 mm/AWG 13
- Pointed head with grooves for working in hard to access places
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7092	7,5	11,0	125,0	10,0	62	140,50

## ESD mini carbide oblique cutter


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 84-86 HRA
- Piano wire: 0.6 mm/AWG 22
- Hard wire: 1.0 mm/AWG 18
- Flexible wire: 2.0 mm/AWG 12
- Straight head for working in small spaces
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7095	6,5	10,0	120,0	12,0	62	147,90

## ESD carbide side cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 84-86 HRA
- Piano wire: 0.6 mm/AWG 22
- Hard wire: 1.0 mm/AWG 18
- Flexible wire: 2.0 mm/AWG 12
- Oval head
- With control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7090	7,5	11,0	125,0	10,0	62	123,50

## ESD end cutters


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Medium wire: 0.6 mm/AWG 22
- Flexible wire: 0.8 mm/AWG 20
- Slim jaws
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7093	6,5	11,0	130,0	5,0	70	63,50

## ESD mini angled cutters

- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.5 mm/AWG 24
- Medium wire: 1.2 mm/AWG 16
- Flexible wire: 1.6 mm/AWG 14
- Wide head with long cutters
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	A mm	D mm	L mm	S mm	g	€
500.7096	7,5	11,0	125,0	18,0	64	66,50

## ESD mini side cutter

- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Medium wire: 0.6 mm/AWG 22
- Flexible wire: 0.8 mm/AWG 22
- Slim jaws with small cutting edges
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	D mm	L1 mm	L2 mm	S mm	g	€
500.7097	10,0	120,0	17,0	2,5	63	59,90

## ESD side cutter


- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.5 mm/AWG 24
- Medium wire: 1.2 mm/AWG 16
- Flexible wire: 1.6 mm/AWG 14
- Wide head with long cutters
- With subtle control
- Self opening double spring
- Two component handle
- Special tool steel



	D mm	L1 mm	L2 mm	S mm	g	€
500.7098	11,0	125,0	6,0	15,0	74	58,90

## ESD wire strippers

- Electrostatically protect
- With internal brass adjusting screw
- Suitable for PVC, Teflon etc.
- Induction-hardened precision cutting
- Medium wire: 0.8 mm/AWG 20
- Self opening double spring
- Two component handle
- Special tool steel

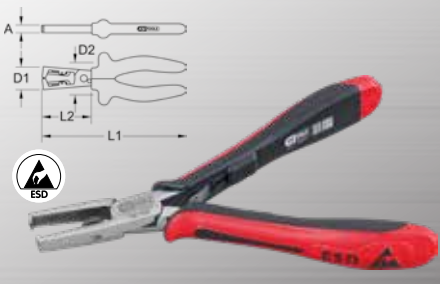

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	€
500.7099	12,0	32,0	18,0	140,0	50,0	90	63,50

## ESD PRECISION PLIER SETS

### ESD pliers service map

- Electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting
- Self opening double spring
- Two component handle
- Special tool steel



	g	€
500.7019 6 pcs ESD pliers service map	620	352,50

1 x		140 mm
1 x		140 mm
1 x		130mm
1 x		120 mm
1 x		125 mm
1 x		120 mm



## SOLDERING TIN SUCTION PUMP

### Desoldering pump

- double seal
- Dirt-repellent



	Length mm	g	€
500.7780	200,0	580	10,90

## GAS SOLDERING EQUIPMENT

### Mini pocket soldering torch

- Gas operated micro soldering device up to 1,300°C / 2,450 °F
- With piezo ignition
- Optimal for light soldering
- Filled with standard lighter gas / ISO butan gas
- Compact construction
- With safety lock



	Length mm	Height mm	g	€
960.1110	70,0	115,0	130	8,90

### Small soldering torch

- Gas operated micro soldering device up to 1,300°C / 2,450 °F
- With piezo ignition
- Optimal for fine soldering
- Filled with standard lighter gas / ISO butan gas
- With table stand



	Length mm	Height mm	g	€
960.1200	110,0	140,0	350	38,50

### Small soldering torch with flame reflector

- Gas operated micro soldering device up to 1,300°C / 2,450 °F
- With piezo ignition
- Optimal for fine soldering
- With shrink mirror/flame reflector
- Filled with standard lighter gas / ISO butan gas
- With table stand




	Length mm	Height mm	g	€
960.1210	110,0	135,0	350	59,90



### Micro soldering terminal set

- Gas operated micro soldering device up to 1,300°C / 2,450°F
- without piezo ignition
- can be started with an external ignition source (e.g. with a lighter or mini pocket soldering device)
- Perfect for fine working
- Gas supply totally adjustable
- Filled with standard lighter gas / ISO butan gas
- Includes different attachments soldering wire and soldering sponge
- In durable plastic case




			€
<b>960.1265</b>	8 pcs Micro soldering terminal set	210	<b>29,90</b>

consists of:

<b>960.1163</b>	Soldering tip 3.5mm, chisel	3
<b>960.1164</b>	Soldering tip 4.5mm, diagonal	3
<b>960.1165</b>	Soldering tip knife	3
<b>960.1167</b>	Soldering sponge, round	12
<b>960.1168</b>	Solder wire coil, 95mm	25
<b>960.1266</b>	Soldering iron without Piezo ignition	50
<b>960.1267</b>	Soldering head, screwed-in soldering tips	12
<b>960.1268</b>	Soldering tip	3

### Micro soldering terminal set

- Gas operated micro soldering device up to 1,300°C / 2,450°F
- With piezo ignition
- Perfect for fine working
- Gas supply totally adjustable
- Filled with standard lighter gas / ISO butan gas
- Includes different attachments soldering wire and soldering sponge
- In durable plastic case



			€
<b>960.1160</b>	11 pcs Micro soldering terminal set	370	<b>29,90</b>

consists of:

<b>960.1161</b>	Soldering iron with Piezo ignition	80
<b>960.1162</b>	Soldering head, screwed-in soldering tips	9
<b>960.1163</b>	Soldering tip 3.5mm, chisel	3
<b>960.1164</b>	Soldering tip 4.5mm, diagonal	3
<b>960.1165</b>	Soldering tip knife	3
<b>960.1166</b>	Flame adaptor	3
<b>960.1167</b>	Soldering sponge, round	12
<b>960.1168</b>	Solder wire coil, 95mm	25
<b>960.1169</b>	Protective cap for 960.1160	14
<b>960.1170</b>	Housing for additional adaptors, for 960.1160	7
<b>960.1268</b>	Soldering tip	3

## PRECISION MECHANICS ACCESSORIES

### Precision mechanics lifter


- removes stuck components from printed circuit boards
- Two component handle
- through hardened blade
- Matt finish
- Chrome molybdenum



	L1 mm	L2 mm		€
<b>500.7775</b>	150,0	50,0	16	<b>2,90</b>

### Soldering wire pliers

- For the safe fixing of braded wire
- Prevents kinking of the solder connection
- The locking device of the pliers means that these can be stored so that both hands are free for soldering
- No more burning fingers
- Slim design for hard-to-access areas
- Adjustable arm for optimal application
- With self opening internal spring
- Includes locking mechanism
- With PVC dipped handle
- Chrome molybdenum



	A mm	C mm	L mm		€
<b>115.1052</b>	9-74	65,0	245,0	260	<b>29,90</b>



# NEW



## K20

TOOLS FOR  
CRAFTSMEN  
AND MECHANICS



**30** ≡ CHAPTER  
**19.827** ✂ ITEMS  
**816** 📄 PAGES

## K20

SPECIAL TOOLS FOR  
PASSENGER CARS &  
LIGHT COMMERCIAL  
VEHICLES



**25** ≡ CHAPTER  
**8.922** ✂ ITEMS  
**808** 📄 PAGES

## K20

SPECIAL TOOLS  
FOR COMMERCIAL  
VEHICLES &  
TRANSPORTER



**23** ≡ CHAPTER  
**4.672** ✂ ITEMS  
**528** 📄 PAGES



PREMIUM-WERKZEUGE



PREMIUM TOOLS



PREMIUM-WERKZEUGE



PREMIUM TOOLS



21  
pcs



500.7190

### Precision tool set

- Electrical working
- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Self opening double spring

99,90 €

ex. VAT.

2 x		125 - 130 mm
1 x		100 mm
1 x		100 mm
1 x		125 mm
1 x		150 mm
1 x		145 mm
3 x		PH00 - PH0 - PH1
4 x		1,4 - 2,0 - 2,4 - 3,0 mm
7 x		T6 - T7 - T8 - T9 - T10 - T15 - T20

Your Local Distributor:

PREMIUM-WERKZEUGE



PREMIUM TOOLS

KS Tools Werkzeuge - Maschinen GmbH  
Seligenstädter Grund 10 - 12  
D-63150 Heusenstamm

GERMANY

Tel.: +49(0) 61 04 49 74-0  
Fax: +49(0) 61 04 49 74-11  
e-mail: kstools@kstools.de  
www.kstools.com



LL22-22EN\_EUR