



PREMIUM-WERKZEUGE



PREMIUM TOOLS



www.kstools.com

# TORQUE TOOLS



**516.6042**


## ERGOTORQUE® precision TORQUE WRENCH 40-200 NM WITH QUICK LOCK ROTARY MUSHROOM RATCHET HEAD

- Actuation accuracy:  $\pm 3\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Torque setting by pulling out and pushing in the slide in knob at the end of the handle
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Double scale in Nm and lbf•ft divisions for precise adjustment
- Includes micrometer scale in Nm divisions for precise and fine adjustment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- Exact gearing 30 teeth ratchet mechanism
- With ejection mechanism on the ratchet head
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards

*Limited*  
**EDITION**



**$\pm 3\%$**



**1/2"**  
**40-200 Nm**



**106,90** €

4-point Drive	Nm	Division Nm	Lbf-ft	L mm	D mm	H mm	kg
1/2"	40-200	1,00	15 - 150	500,0	45,0	23,0	1,30



DIN EN ISO 6789



\*This is an limited special price offer - only until stocks last.  
 All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## TORQUE SCREWDRIVERS

This torque screwdriver is fitted with a friction clutch. This enables it to ratchet when the set value is achieved. As a result, it is not possible to over-tighten the screw. The torque screwdriver has fastening function in clockwise directions and is adjusted with the help of a micrometer scale.

Ergonomic design of the handle provides secure transmission of the torque

Micrometer scale enables precise and quick adjustment

Lightweight construction due to the aluminium handle

Accuracy of

**±6 %**

of the scale reading

Precise reading accuracy for a minimum 5,000 tightening cycles

1/4" drive tool holder (stainless) for industry standard bits


1/4" square drive to fit industry standard nut sockets

Anti-slip locking mechanism



### PRECISION TORQUE TESTING INSTRUMENT WITH DIAL INDICATOR AND DRAG INDICATOR


- Display accuracy: ±6 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5,000 tightening cycles
- For controlled display in a clockwise and counter clockwise direction
- For testing, measuring, checking and making adjustments
- Display torque testing instrument with drag indicator
- Large vision panel for precise adjustment
- Tool mounting using a three jaw chuck
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



	Measuring range mNm	Measuring range cNm	Division mNm	Division cNm	Chuck Ø mm	L mm		
516.3310	1-9		0,2		1-6,5	83,0	290	€ 982, <sup>50</sup>
516.3315	2-15		0,2		1-6,5	83,0	290	€ 1176, <sup>90</sup>
516.3320	4-30		0,5		1-6,5	83,0	290	€ 982, <sup>50</sup>
516.3325	5-60		1		1-6,5	83,0	290	€ 982, <sup>50</sup>
516.3330	10-120		2		1-6,5	83,0	290	€ 982, <sup>50</sup>
516.3335	20-240		5		1-6,5	83,0	290	€ 1048, <sup>50</sup>
516.3410		1-15	0,2		1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3415		2-24	0,2		1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3420		4-36	0,5		1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3425		5-60	1,0		1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3430		10-90	2,0		1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3435		10-150	2,0		1-8,5	102,0	600	€ 1455, <sup>50</sup>

### ESD TORQUE SCREWDRIVER WITH MICROMETER SCALE

- Actuation accuracy: ±6 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5,000 tightening cycles
- For controlled fastening in a clockwise direction
- With precision helical pressure spring
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Including a micrometre scale in Nm divisions for precise and fine adjustment
- Ergonomic designed handle provides secure transmission of the torque
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Electrostatically protect
- Lightweight construction due to the aluminium handle
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



	Measuring range cNm	Division cNm	Division Nm	L1 mm	L2 mm	D1 mm	D2 mm		
516.3210	1-15	0,1		111,0	26,0	16,0	10,0	60	€ 357, <sup>50</sup>
516.3215	2-30	0,2		111,0	26,0	16,0	10,0	60	€ 369, <sup>50</sup>
516.3220	5-60	0,5		111,0	26,0	25,0	10,0	99	€ 369, <sup>50</sup>
516.3225	20-120	1,0		157,0	51,0	30,0	10,0	192	€ 399, <sup>50</sup>
516.3235	40-300	1,0		157,0	51,0	34,0	10,0	214	€ 369, <sup>50</sup>
516.3240	100-500	2,5		200,0	63,0	40,0	10,0	436	€ 436, <sup>50</sup>
516.3245	400-1000		0,05	235,0	100,0	45,0	11,0	762	€ 721, <sup>50</sup>


\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## TORQUE SCREWDRIVER WITH MICROMETER SCALE

- Actuation accuracy:  $\pm 6\%$  tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- With precision helical pressure spring
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Including a micrometre scale in Nm divisions for precise and fine adjustment
- Ergonomic designed rubber handle provides secure torque transmission
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards




1/4" 6,3 mm

	Measuring range cNm	Division Nm	L1 mm	L2 mm	D1 mm	D2 mm	Weight	Price
516.3250	10 - 120	0,01	180,0	28,0	30,0	11,0	230	€ 266, <sup>50</sup>
516.3255	100 - 600	0,10	200,0	30,0	35,0	11,0	450	€ 248, <sup>50</sup>

## PRE-SET TORQUE SCREWDRIVER

- Actuation accuracy:  $\pm 6\%$  tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Without scale - with a fixed adjustable value
- Ergonomic designed handle provides secure transmission of the torque
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards





1/4" 6,3 mm

	Working range Nm	L1 mm	L2 mm	D1 mm	D2 mm	Weight	Price
516.3930	0,2 - 1,2	132,0	25,0	30,0	11,0	185	€ 223, <sup>50</sup>
516.3935	1 - 1,8	132,0	25,0	30,0	11,0	185	€ 223, <sup>50</sup>
516.3940	1 - 6	200,0	25,0	30,0	11,0	445	€ 236, <sup>50</sup>

## ESD FIXED ADJUSTABLE TORQUE SCREWDRIVER WITH COLOUR CODING

- Actuation accuracy:  $\pm 6\%$  tolerance from the set value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- With precision helical pressure spring
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Without scale - with a fixed adjustable value
- Ergonomic designed handle provides secure transmission of the torque
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Electrostatically protect
- Lightweight construction due to the aluminium handle
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards




1/4" 6,3 mm ESD

	Measuring range cNm	L1 mm	L2 mm	D1 mm	D2 mm	Colour	Weight	Price
516.3910	1 - 15	92,0	22,0	16,0	8,0	-	45	€ 291, <sup>50</sup>
516.3915	5 - 60	102,0	40,0	25,0	10,0	-	94	€ 291, <sup>50</sup>
516.3920	40 - 200	111,0	49,0	30,0	10,0	green	170	€ 364, <sup>50</sup>
516.3925	100 - 500	126,0	56,0	35,0	10,0	red	220	€ 418, <sup>50</sup>

## ESD DIAL INDICATING TORQUE SCREWDRIVER WITH A DRAG INDICATOR

- Display accuracy:  $\pm 6\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled display in a clockwise and counter clockwise direction
- Torque screwdriver with a helical pressure spring
- Ergonomic designed handle provides secure transmission of the torque
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Electrostatically protect
- Lightweight construction due to the aluminium handle
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



1/4" 6,3 mm ESD

	Measuring range cNm	Division cNm	L1 mm	L2 mm	D1 mm	D2 mm	Weight	Price
516.3260	20 - 100	2,0	222,0	130,0	48,0	12,0	290	€ 436, <sup>50</sup>
516.3265	50 - 200	5,0	242,0	130,0	48,0	12,0	320	€ 460, <sup>50</sup>
516.3270	100 - 500	20,0	300,0	188,0	48,0	14,0	420	€ 460, <sup>50</sup>



## STUBBY TORQUE WRENCH WITH EXACT GEARING REVERSIBLE RATCHET HEAD

- Actuation accuracy:  $\pm 3\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 72 teeth ratchet mechanism
- With ejection mechanism on the ratchet head
- Ergonomic designed handle provides secure transmission of the torque
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



	4-point Drive	Working range Nm	Division Nm	L mm	D mm	Weight	
<b>516.3280</b>	1/4"	3 - 15	0,50	170,0	18,0	190	€ 291, <sup>90</sup>

## ROTARY ANGLE DISCS

### ROTARY ANGLE DISC

- For fastening screws at an angle
- Device for angle regulated fastening with a torque wrench
- Flexible arm
- Range 0° - 360°
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Optionally with a magnetic arm or claw arm



	4-point Drive	4-point Receiver	Arm	Division	D mm	H mm	L mm	Weight	
<b>516.1195</b>	1/2"	1/2"	magnet	2°	63,0	60	480,0	170	€ 52, <sup>90</sup>
<b>516.1196</b>	1/2"	1/2"	claw	2°	63,0	60	538,0	60	€ 52, <sup>90</sup>
<b>516.1197</b>	3/4"	3/4"	magnet	2°	79,0	64	500,0	170	€ 52, <sup>90</sup>
<b>516.1198</b>	3/4"	3/4"	claw	2°	79,0	64	698,0	60	€ 52, <sup>90</sup>

## DIGITAL ANGLE OF ROTATION & TORQUE ADAPTERS

### DIGITAL ROTATION PROTRACTOR WITH MAGNET

- For fastening screws at an angle
- Magnetic
- digital angle display
- acoustic signal and LED display refer to reaching the set angle
- Right- and left-hand suit
- Angle precision:  $\pm 2\%$
- Resolution: 0.1°
- Includes 2 AAA 1,5 V batteries
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards
- In durable plastic storage case



	Ø mm	Weight	
<b>516.1191</b>	55,0	720	€ 266, <sup>90</sup>

### DIGITAL TORQUE ADAPTER WITH PROTRACTOR

- 1/2" square drive and output
- Right- and left-hand suit
- Clockwise torque precision: 3% and counterclockwise:  $\pm 4\%$
- Digital torque and rotation angle display
- acoustic signal and LED display indicate that the set angle of rotation or torque has been reached
- 5 selectable units (Nm, ft-lb, in-lb, kg-cm, degrees)
- Includes 2 AAA 1,5 V batteries
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards
- In durable plastic storage case



	4-point Drive	4-point Receiver	Ø mm	Working range Nm	Weight	
<b>516.1192</b>	1/2"	1/2"	85,0	27-135	242	€ 291, <sup>90</sup>
<b>516.1193</b>	1/2"	1/2"	85,0	40-200	242	€ 291, <sup>90</sup>
<b>516.1194</b>	1/2"	1/2"	85,0	68-340	242	€ 291, <sup>90</sup>

\*This is an limited special price offer - only until stocks last.


All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## TORQUE LIMITERS

### TORQUE LIMITER FOR SPARK PLUGS

- High accuracy
- For controlled fastening in a clockwise direction
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Without scale - with a fixed adjustable value
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock




3/8"

	4-point Drive	4-point Receiver	Nm	L mm	D mm	⚙️	
516.1501	3/8"	3/8"	18	51,5	28,0	165	€ 42, <sup>90</sup>
516.1502	3/8"	3/8"	24	52,0	28,0	166	€ 42, <sup>90</sup>



### PRE-SET TORQUE LIMITER WITH BALL LOCK

- High accuracy
- For controlled fastening in clockwise and counter clockwise directions
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Without scale - with a fixed adjustable value
- Easy to operate
- For application with low torque
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock



3/8"

	4-point Drive	4-point Receiver	Working range Nm	D1 mm	D2 mm	L mm	⚙️	
516.1507	3/8"	3/8"	0,5-5	22,0	10,0	75,0	95	€ 100, <sup>90</sup>
516.1508	3/8"	3/8"	5-10	22,0	10,0	75,0	95	€ 100, <sup>90</sup>

### PRE-SET TORQUE LIMITER WITH BALL LOCK

- High accuracy
- For controlled fastening in clockwise and counter clockwise directions
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Without scale - with a fixed adjustable value
- Easy to operate
- For application with low torque
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Square drive in accordance with DIN 3120 - ISO 1174



3/8"

6,3 mm

	4-point Receiver	Internal 6 point drive	Working range Nm	D1 mm	D2 mm	L mm	⚙️	
516.1503	3/8"	1/4"	0,5-5	22,0	11,0	75,0	90	€ 112, <sup>90</sup>
516.1504	3/8"	1/4"	5-10	22,0	11,0	75,0	90	€ 112, <sup>90</sup>

\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## TORQUE WRENCH

### Ratchet head:

A highly robust ratchet mechanism for clockwise and counter-clockwise tightening is integrated in the polished ratchet head. Changing the direction of rotation is done by simply rotating the square drive with the help of the push-button quick release function on the ratchet head. A sliding roller bearing mechanism in the interior of the wrench ensures the highest level of accuracy and a long service life. An audible and palpable signal indicates automatically that the desired torque value has been achieved.

**Handle end:**  
 The desired torque can be adjusted and set by simply pulling the out locking knob, adjusting and then pushing in the locking knob at the end of the handle, using the ergonomic finger grips. A black ring on the locking knob indicates that the wrench must be set and adjusted for the required torque and also prevents inadvertent maladjustment of the wrench when using it.

### Micrometer scale:

Even fine adjustments can be made with the help of the white micrometer scale. The vision panel has been sized liberally and ensures that the micrometer value can be read off the scale in an optimal and simple manner using the magnifying glass. Thus, depending on the model, divisions of 1/0,5/0,1 or 0,025 Nm can be adjusted accurately.

Accuracy of  
**±3 %**  
 of the scale reading  
 Precise reading accuracy for a  
 minimum 5,000 tightening cycles

**Serial number:**  
 A permanent and unique serial number is applied on all torque wrenches, which provides unique product identification.

**Two-component handle:**  
 The new durable and ergonomic two-component handle ensures safe and effortless working, whereby the softer component prevents the hand from slipping and provides maximum safety.

### Scale with magnifying glass:

A double scale having Nm and Lbf•ft divisions that can be read easily, is concealed under a large sized vision panel, which enables particularly accurate adjustment of the desired torque value. In order to be able to read off the scale in an optimal and simple manner, a strong magnifying glass is integrated in the vision panel.

**Corrosion:**  
 The robust steel pipe body is coated with a powder coating protection in order to ensure durable corrosion-proof properties.



1/4" - 1/2"

1/4" - 1"

9x12 mm

14x18 mm

## RATCHET HEADS

### PUSH BUTTON RELEASE

Quick-Lock mechanism on the ratchet head



### MUSHROOM HEAD WITH SQUARE

The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece. The torque wrenches can be upgraded to another drive size with the the range of accessories available.



### ROBUST LATCH HEAD

Robust ratchet mechanism for left and right tightening





## ERGOTORQUE®PRECISION TORQUE WRENCH

### T-HANDLE BOX WRENCH

- Enables quick pre-fastening of the screw connections
- Especially for using in confined spaces
- Especially suitable for rapid screw tightening with the T-handle
- It is simply to be used in place of the standard box wrench
- Ergonomically shaped T-handle
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock



1/4" 3/8" 1/2"

	4-point Receiver	4-point Drive	B mm	L mm	kg	
516.1404	3/8"	1/4"	83,0	72,0	51	€ 7, <sup>90</sup>
516.1414	3/8"	3/8"	83,0	72,0	51	€ 8, <sup>90</sup>
516.1424	1/2"	3/8"	100,0	83,0	97	€ 10, <sup>90</sup>
516.1444	1/2"	1/2"	100,0	83,0	107	€ 16, <sup>90</sup>

### ROTARY SQUARE BOX WRENCH

- Enables quick pre-fastening of the screw connections, especially in constrained spaces
- Simple to be used in place of the standard box wrench
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- With ejection mechanism on the ratchet head



1/4" 3/8" 1/2" 3/4" 1"

	4-point Receiver	4-point Drive	D mm	L mm	kg	
516.1408	3/8"	1/4"	31,0	33,0	21	€ 9, <sup>90</sup>
516.1418	3/8"	3/8"	31,0	33,0	21	€ 9, <sup>90</sup>
516.1428	1/2"	3/8"	39,0	52,0	65	€ 11, <sup>90</sup>
516.1448	1/2"	1/2"	39,0	52,0	65	€ 11, <sup>90</sup>
516.1499	3/4"	3/4"	63,0	73,0	180	€ 39, <sup>90</sup>
516.1492	1"	3/4"	83,0	78,0	380	€ 39, <sup>90</sup>
516.1498	1"	1"	83,0	78,0	380	€ 39, <sup>90</sup>


## ERGOTORQUE®precision TORQUE WRENCH WITH ROTARY MUSHROOM RATCHET HEAD

- Actuation accuracy:  $\pm 3\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Torque setting by pulling out and pushing in the slide at the end of the handle
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Double scale in Nm and lbf•ft divisions for precise adjustment
- Includes micrometer scale in Nm divisions for precise and fine adjustment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- Exact gearing 30 teeth ratchet mechanism
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- With ejection mechanism on the ratchet head
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



1/4" 3/8" 1/2" 3/4" 1"

	4-point Drive	Nm	Division Nm	Lbf-ft	L mm	D mm	Height mm	kg	
516.1402	1/4"	1-5	0,10	0,8 - 3,6	289,0	35,0	18,0	0,46	€ 99, <sup>90</sup>
516.1412	1/4"	5-25	0,10	0,8 - 18	289,0	35,0	18,0	0,46	€ 99, <sup>90</sup>
516.1422	3/8"	10-50	0,25	4 - 37	350,0	45,0	23,0	0,61	€ 99, <sup>90</sup>
516.1432	1/2"	20-100	0,50	8 - 75	412,0	45,0	23,0	0,91	€ 110, <sup>90</sup>
516.1442	1/2"	40-200	1,00	15 - 150	500,0	45,0	23,0	1,30	€ 110, <sup>90</sup>
516.1472	1/2"	60-320	1,00	45 - 236	585,0	45,0	23,0	1,45	€ 124, <sup>90</sup>
516.1482	1/2"	80-420	1,00	60 - 310	678,0	45,0	23,0	2,10	€ 135, <sup>90</sup>
516.1490	3/4"	110-550	1,00	75 - 405	960,0	69,0	33,0	3,80	€ 593, <sup>90</sup>
516.1493	3/4"	150-750	10,00	150 - 550	1250,0	69,0	33,0	7,30	€ 588, <sup>90</sup>
516.1495	1"	200-1000	20,00	220 - 730	1500,0	90,0	36,0	5,80	€ 673, <sup>90</sup>





## ERGOTORQUE®precision TORQUE WRENCH WITH REVERSIBLE RATCHET HEAD


- Actuation accuracy:  $\pm 3\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Double scale in Nm and lbf·ft divisions for precise adjustment
- Includes micrometer scale in Nm divisions for precise and fine adjustment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 36 teeth ratchet mechanism
- With ejection mechanism on the ratchet head
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



1/4" 3/8" 1/2"




	4-point Drive	Nm	Division Nm	Lbf-ft	L mm	D mm	Height mm	Weight kg	
516.1512	1/4"	5-25	0,10	0,8 - 18	289,0	35,0	18,0	0,46	€ 133, <sup>90</sup>
516.1522	3/8"	10-50	0,25	4 - 37	350,0	45,0	23,0	0,61	€ 145, <sup>90</sup>
516.1532	1/2"	20-100	0,50	8 - 75	412,0	45,0	23,0	0,91	€ 145, <sup>90</sup>
516.1542	1/2"	40-200	1,00	15 - 150	500,0	45,0	23,0	1,30	€ 145, <sup>90</sup>
516.1572	1/2"	60-320	1,00	45 - 236	585,0	45,0	23,0	1,45	€ 157, <sup>90</sup>
516.1582	1/2"	80-420	1,00	60 - 310	678,0	45,0	23,0	2,10	€ 170, <sup>90</sup>



## ERGOTORQUE®precision FINE ADJUSTMENT TORQUE WRENCH WITH RECTANGULAR TOOL HOLDER

- Actuation accuracy:  $\pm 3\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Double scale in Nm and lbf·ft divisions for precise adjustment
- Includes micrometer scale in Nm divisions for precise and fine adjustment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards




9x12 mm 14x18 mm

	Drive in mm	Nm	Division Nm	Lbf-ft	L mm	Lk mm	Sk mm	Weight kg	
516.1612	9x12	5-25	0,10	0,8 - 18	280,0	245,0	17,5	0,30	€ 127, <sup>90</sup>
516.1622	9x12	10-50	0,25	4 - 37	335,0	295,0	17,5	0,45	€ 127, <sup>90</sup>
516.1632	9x12	20-100	0,50	8 - 75	375,0	335,0	17,5	0,60	€ 127, <sup>90</sup>
516.1633	14x18	20-100	0,50	8 - 75	375,0	335,0	17,5	1,02	€ 127, <sup>90</sup>
516.1642	9x12	40-200	1,00	15 - 150	465,0	425,0	17,5	0,85	€ 133, <sup>90</sup>
516.1652	14x18	40-200	1,00	15 - 150	470,0	435,0	25,0	0,90	€ 145, <sup>90</sup>
516.1672	14x18	60-320	1,00	45 - 236	565,0	530,0	25,0	1,20	€ 170, <sup>90</sup>
516.1682	14x18	80-420	1,00	60 - 310	650,0	435,0	25,0	1,60	€ 187, <sup>90</sup>
516.1690	14x18	110-550	1,00	74,0 - 405	920,0	875,0	25,0	3,75	€ 666, <sup>90</sup>
516.1693	14x18	150-750	1,00	148 - 553	1120,0	1155,0	25,0	5,27	€ 732, <sup>90</sup>

## ERGOTORQUE®precision FINE ADJUSTMENT TORQUE WRENCH WITH RECTANGULAR TOOL HOLDER

- Actuation accuracy:  $\pm 3\%$  tolerance from the set value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Without scale - with a fixed adjustable value
- An audible and palpable signal when the desired torque value is achieved
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



9x12 mm 14x18 mm

	Drive in mm	Nm	Lbf-ft	L mm	Lk mm	Sk mm	Weight kg	
516.1810	9x12	5-25	0,8 - 18	190,0	155,0	17,5	230	€ 133, <sup>90</sup>
516.1820	9x12	10-50	4 - 37	250,0	210,0	17,5	300	€ 133, <sup>90</sup>
516.1830	9x12	20-85	12 - 64	330,0	280,0	17,5	370	€ 133, <sup>90</sup>
516.1840	14x18	40-200	15 - 150	410,0	370,0	25,0	780	€ 133, <sup>90</sup>



## PUSH FIT TOOLKIT

**516.1720**

### TORQUE TOOL SET WITH PLUG IN TOOLS

- Set contents for universal applications
- With snap lock rectangular tool holder for 9x12 range of end tool
- Supplied in a metal carrying case with the tools clearly organised



**29**  
pcs

**2,20**

**3/8"** **9x12 mm**

**€ 571,50**

1 x 5 - 50 N·m

11 x 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 mm

10 x 7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 mm

6 x 10 - 11 - 12 - 13 - 14 - 17 mm

1 x 3/8"

**516.1225**

### ERGOTORQUE® precision REFRIGERATION/AIR CONDITIONING TORQUE WRENCH TOOL SET 20 - 100 NM

- Set contents ideal for air conditioning and refrigeration engineers
- Actuation accuracy:  $\pm 3\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Changing the operating direction takes place by turning the torque wrench

**8**  
pcs

**3,40**



**1/2"** **14x18 mm**

**€ 339,50**

1 x 20 - 200 N·m

6 x 17 - 22 - 24 - 26 - 27 - 29 mm

1 x 1/2"

**516.1730**

### TORQUE TOOL SET WITH PLUG IN TOOLS

- Set contents for universal applications
- With snap lock rectangular tool holder for 14x18 range of end tools
- Supplied in a metal carrying case with the tools clearly organised



**31**  
pcs

**5,80**

**1/2"** **14x18 mm**


**€ 763,90**

1 x 20 - 200 N·m

13 x 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 - 30 - 32 mm

16 x 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 - 41 mm

1 x 1/2"

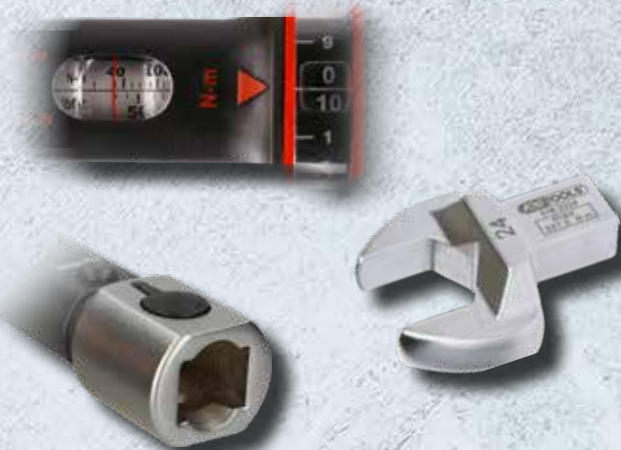



## ERGOTORQUE®PRECISION TORQUE WRENCH TOOLKIT

**516.1905**

### ERGOTORQUE®PRECISION TORQUE WRENCH WITH BAG

- Actuation accuracy:  $\pm 3\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- An audible and palpable signal when the desired torque value is achieved
- Torque setting is quick and easy using the locking knob in the handle end

**5**  
pcs

**2,50**



**1/2"**

**€ 200,50**

1 x 40 - 200 N·m

1 x 125 mm

3 x 17 - 19 - 21 mm

**516.1515**

### ERGOTORQUE®precision TORQUE WRENCH TOOLKIT 5-25 NM

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

**31**  
pcs

**5,00**



**1/4"**

**€ 291,50**

1 x 5 - 25 N·m

4 x 50 - 75 - 100 - 150 mm

13 x 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm

6 x 3 - 4 - 5 - 6 - 7 - 8 mm

7 x T10 - T15 - T20 - T25 - T27 - T30 - T40

**516.1415**

### ERGOTORQUE®precision TORQUE WRENCH TOOLKIT 5 - 25 NM

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

**32**  
pcs

**4,73**



**1/4"**

**€ 291,50**

1 x 5 - 25 N·m

4 x 50 - 75 - 100 - 150 mm

13 x 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm

6 x 3 - 4 - 5 - 6 - 7 - 8 mm

7 x T10 - T15 - T20 - T25 - T27 - T30 - T40

1 x 3/8" x 1/4"

**516.1425**

### ERGOTORQUE®precision TORQUE WRENCH TOOLKIT 10 - 50 NM

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

**41**  
pcs

**10,23**



**3/8"**

**€ 393,90**

1 x 10 - 50 N·m

3 x 75 - 150 - 250 mm

18 x 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm

7 x 3 - 4 - 5 - 6 - 7 - 8 - 10 mm

11 x T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60

1 x 3/8"



## 516.1525

### ERGOTORQUE® precision TORQUE WRENCH TOOLKIT 10 - 50 NM

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

40  
pcs

6,62



3/8"

€ 369,50

1 x		10 - 50 N·m
3 x		75 - 150 - 250 mm
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm
7 x		3 - 4 - 5 - 6 - 7 - 8 - 10 mm
11 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60


## 516.1445

### ERGOTORQUE® precision TORQUE WRENCH TOOLKIT 40 - 200 NM

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

49  
pcs

13,90

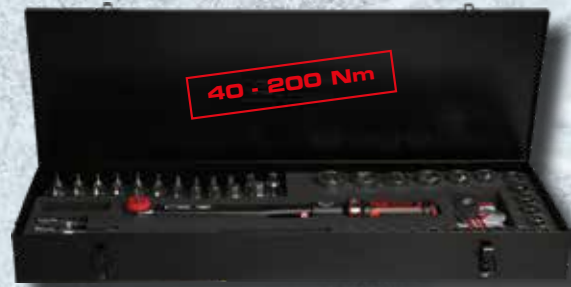

1/2"

€ 460,50

1 x		40 - 200 N·m
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70
1 x		1/2"


## 516.1435

### ERGOTORQUE® precision TORQUE WRENCH TOOLKIT 20 - 100 NM

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

49  
pcs

13,48

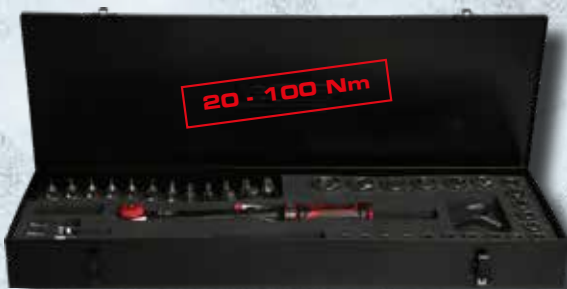

1/2"

€ 460,50

1 x		20 - 100 N·m
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70
1 x		1/2"

## 516.1475

### ERGOTORQUE® precision TORQUE WRENCH TOOLKIT 60-320 NM

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

49  
pcs

13,98



1/2"

€ 641,90

1 x		60 - 320 N·m
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70
1 x		1/2"

\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



**516.1535**

**ERGOTORQUE® precision TORQUE WRENCH TOOLKIT  
20 - 100 NM**

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

**48  
pcs**

**13,61**



**1/2"**

**€ 460,50**

1 x		20 - 100 N·m
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70

**516.1575**

**ERGOTORQUE® precision TORQUE WRENCH TOOLKIT  
60-320 NM**

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

**48  
pcs**

**14,11**



**1/2"**

**€ 527,50**

1 x		60 - 320 Nm
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70

**516.1545**

**ERGOTORQUE® precision TORQUE WRENCH TOOLKIT  
40 - 200 NM**

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

**48  
pcs**

**13,81**



**1/2"**

**€ 496,50**

1 x		40 - 200 N·m
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70

**516.1585**

**ERGOTORQUE® precision TORQUE WRENCH TOOLKIT  
80-420 NM**

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

**48  
pcs**

**14,51**



**1/2"**

**€ 527,50**

1 x		80 - 420 N·m
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70

\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## 516.1615

### ERGOTORQUE® precision TORQUE WRENCH TOOLKIT 5 - 25 NM

- Set contents for universal applications
- Includes torque wrench with rectangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

**33**  
pcs

**8,47**



9x12  
mm

**€ 763,90**

1 x		5 - 25 N·m
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm
2 x		1/4" - 5/16"
1 x		9 x 12
2 x		1/4" - 3/8"

## 516.1635

### ERGOTORQUE® precision TORQUE WRENCH TOOLKIT 20 - 100 NM

- Set contents for universal applications
- Includes torque wrench with rectangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

**33**  
pcs

**8,92**



9x12  
mm

**€ 721,50**

1 x		20 - 100 N·m
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm
2 x		1/4" - 5/16"
1 x		9 x 12
2 x		1/4" - 3/8"

## 516.1625

### ERGOTORQUE® precision TORQUE WRENCH TOOLKIT 10 - 50 NM

- Set contents for universal applications
- Includes torque wrench with rectangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

**33**  
pcs

**8,56**



9x12  
mm

**€ 721,50**

1 x		10 - 50 N·m
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm
2 x		1/4" - 5/16"
1 x		9 x 12
2 x		1/4" - 3/8"

## 516.1645

### ERGOTORQUE® precision TORQUE WRENCH TOOLKIT 40 - 200 NM

- Set contents for universal applications
- Includes torque wrench with rectangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

**33**  
pcs

**14,51**



9x12  
mm

**€ 732,90**

1 x		40 - 200 N·m
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm
2 x		1/4" - 5/16"
1 x		9 x 12
2 x		1/4" - 3/8"



# TORQUE

**516.1675**

**ERGOTORQUE@precision TORQUE WRENCH TOOLKIT 60-320 NM**

- Set contents for universal applications
- Includes torque wrench with rectangular tool holder
- Supplied in a metal carrying case with the tools clearly organised




**39**  
pcs




  
**15,25**



**14x18**  
mm

**€ 1112,90**

1 x		60 - 320 N•m
19 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 26 - 27 - 29 - 30 - 32 - 34 - 36 - 38 - 41 mm
16 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 - 41 mm

1 x		5/16"
1 x		14 x 18
1 x		1/2"

**516.1685**

**ERGOTORQUE@precision TORQUE WRENCH TOOLKIT 80-420 NM**

- Set contents for universal applications
- Includes torque wrench with rectangular tool holder
- Supplied in a metal carrying case with the tools clearly organised




**39**  
pcs




  
**15,65**



**14x18**  
mm

**€ 1176,90**

1 x		80 - 420 N•m
19 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 26 - 27 - 29 - 30 - 32 - 34 - 36 - 38 - 41 mm
16 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 - 41 mm

1 x		5/16"
1 x		14 x 18
1 x		1/2"



## SLIPPER TORQUE WRENCH

Fixed preset ratchet torque wrench without scale with automatic trigger via slipping function – no overtightening possible.

**Head:**

A highly robust 36-teeth ratchet mechanism for fastening is integrated in the powder coated ratchet head. A robust ball end mechanism guarantees the highest precision and very long lifetimes. Clear, automatic indication that the desired torque value has been achieved via ratcheting and resetting to the initial position.

Accuracy of

**±4 %**

of the scale reading  
 Precise reading accuracy for a minimum 5.000 tightening cycles

**Handle:**

Ergonomic handle designed for comfortable use



**Serial number:**

A permanent and unique serial number is applied on all torque wrenches, which provides unique product identification.

**Corrosion:**

The robust and resistant light alloy body guarantees lasting corrosion protection.

**Two-component handle:**

The new light, durable and ergonomic two-component handle ensures safe and effortless working, whereby the softer component prevents the hand from slipping and provides maximum safety.



### TECHNOLOGY


**Ratcheting operating principle**

When a preset value is achieved the mechanism slips over the ball end (without the possibility of overtightening). The ratcheting torque wrench can then be used immediately again.



### PRE-SET SLIPPER TORQUE WRENCH

- Release accuracy ±4% Tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For serial and/or conveyor assembly lines
- For controlled fastening in a clockwise direction
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Without scale - with a fixed adjustable value
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- Ergonomic and hand-friendly rubber handle
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards
- Delivery includes crank adjusting key



1/4" 3/8" 1/2"

	4-point Drive	Working range Nm	Lbf-ft	L mm	D mm	Height mm	kg	
516.5000	1/4"	1-5	0,8-4	182,5	15,5	34,3	0,22	€ 787, <sup>50</sup>
516.5001	1/4"	4-10	3-8	182,5	15,5	34,3	0,23	€ 854, <sup>00</sup>
516.5002	3/8"	5-20	4-19	214,0	35,0	49,5	0,48	€ 957, <sup>50</sup>
516.5003	3/8"	15-55	11-40	323,0	39,0	58,5	1,00	€ 1182, <sup>50</sup>
516.5004	1/2"	25-125	19-93	464,0	40,0	67,3	1,85	€ 1514, <sup>50</sup>

\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## ALUTORQEprecision

Torque wrench made from high-strength aluminium alloy

### Ratchet head:

A robust mechanism, optionally with a square drive for controlled fastening or with a double square for controlled clockwise and counter clockwise fastening is integrated into the head.

The ALUTORQEprecision torque wrench is also available with a rectangular reception and guarantees flexible working through this.

The square drives can be expanded with pin ratchets so that the user can decide himself whether he wants to work with or without the ratcheting function. An audible and palpable signal indicates automatically that the desired torque value has been achieved.

Accuracy of **±3 %**  
of the scale reading  
Precise reading accuracy for a minimum 5,000 tightening cycles

1/4" - 1"


1/4" - 1"

### Aluminium handle:

The new light, durable and ergonomic aluminium handle ensures simple and secure operation.

### Serial number:

A permanent and unique serial number is applied on all torque wrenches, which provides unique product identification.

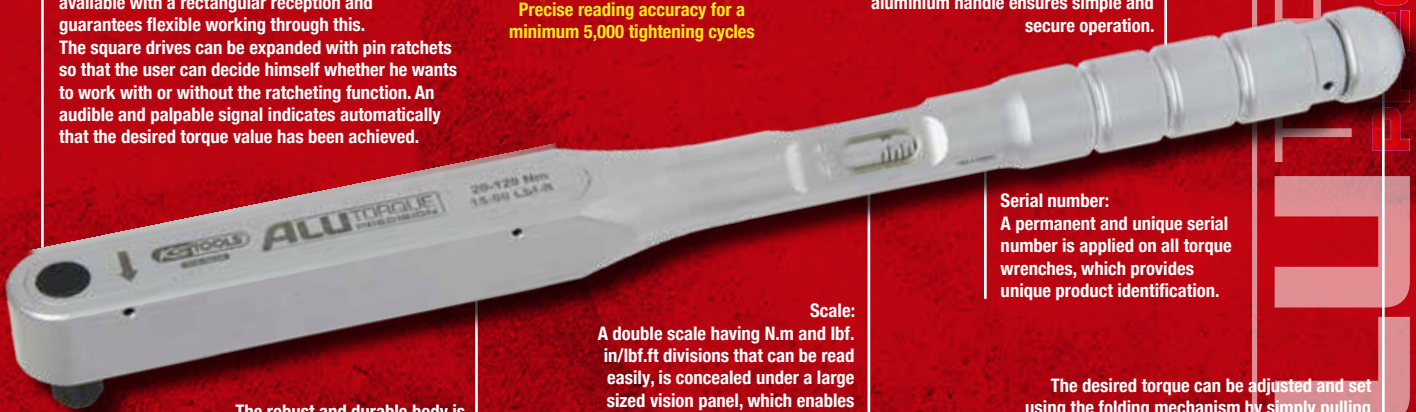

The robust and durable body is ideal for use in harsh environments in industry.


Scale:  
A double scale having N.m and lbf. in/lbf.ft divisions that can be read easily, is concealed under a large sized vision panel, which enables particularly accurate adjustment of the desired torque value.

The desired torque can be adjusted and set using the folding mechanism by simply pulling out and pushing in the captive hexagon key wrench in connection with the locking knob at the end of the handle.




### ALUTORQEprecision TORQUE WRENCH

- Release accuracy:  $\pm 3\%$  tolerance from the set scale value and better
- Use in almost all industrial production areas
- Simple operation - fast and secure torque tightening
- Light, robust and very workshop friendly
- Long service-life and high holding times

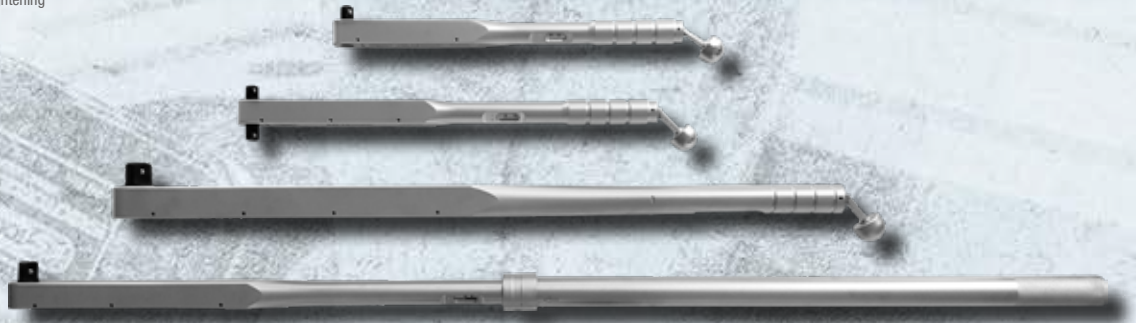

1/2" 3/4" 1"

	4-point Drive	Nm	Division Nm	Lbf-ft	Division lbf-ft	Lk mm	Height mm	L1 mm	L2 mm	L3 mm		kg	
516.5034	☑	25-120	5,00	18-90	5,0	374	30,0	462,0	475,0			1,50	€ 844, <sup>50</sup>
516.5035	☑	25-120	5,00	18-90	5,0	374	30,0	462,0	475,0			1,50	€ 873, <sup>50</sup>
516.5036	☑	40-200	5,00	30-150	5,0	463	30,0	551,0	563,0			1,40	€ 903, <sup>50</sup>
516.5037	☑	40-200	5,00	30-150	5,0	463	30,0	551,0	563,0			1,30	€ 876, <sup>50</sup>
516.5039	☑	60-300	5,00	45-220	5,0	529	30,0	617,0	625,0			2,00	€ 787, <sup>50</sup>
516.5040	☑	60-300	5,00	45-220	5,0	529	30,0	671,0	625,0			2,00	€ 787, <sup>50</sup>
516.5043	☑	110-550	10,00	80-400	10,0	719	35,0	812,0	827,0			2,90	€ 1760, <sup>50</sup>
516.5044	☑	110-550	10,00	80-400	10,0	719	35,0	812,0	827,0			2,90	€ 1760, <sup>50</sup>
516.5045	☑	140-760	10,00	115-560	10,0	719	35,0	812,0	827,0			3,20	€ 1455, <sup>50</sup>
516.5046	☑	155-760	10,00	115-560	10,0	719	35,0	812,0	827,0			3,20	€ 1455, <sup>50</sup>
516.5049	☑	520-1000	10,00	380-730	10,0	1297	35,0	812,0	1413,0	762,0	516.5059	5,60	€ 1497, <sup>90</sup>
516.5050	☑	520-1000	10,00	380-730	10,0	1297	35,0	812,0	1413,0	762,0	516.5059	5,60	€ 1925, <sup>90</sup>
516.5051	☑	600-1500	25,00			1473	40,0	932,0	1608,0	925,0	516.5058	10,80	€ 2364, <sup>90</sup>
516.5052	☑	600-1500	25,00			1473	40,0	932,0	1608,0	925,0	516.5058	10,80	€ 2546, <sup>50</sup>
516.5053	☑	750-2000	50,00			2218	40,0	932,0	2353,0	925,0	516.5057+58	11,60	€ 2665, <sup>50</sup>
516.5054	☑	750-2000	50,00			2218	40,0	932,0	2353,0	925,0	516.5057+58	11,60	€ 2665, <sup>50</sup>



\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## ALUTORQUEPRECISION TORQUE WRENCH


### ALUTORQUEprecision PRE-SET TORQUE WRENCH

- Release accuracy:  $\pm 3\%$  tolerance from the set scale value and better
- Use is almost all industrial production areas
- Depending on option with fast release function button
- Simple operation - fast and secure torque tightening
- Simple and/or double square for controlled fastening in clockwise and counter clockwise directions
- Double-scale Nm and lbf-ft and/or lbf-in division for precise adjustment
- An audible and palpable signal when the desired torque value is achieved
- Secure locking possibility
- Ergonomic and hand-friendly handle
- Light, robust and very workshop friendly
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- Setting the torque by using the captive crank lever mechanism in the handle
- Comfortable setting through shapely, captive adjustment knob on the end of the handle
- Extendible to reduces the workload of the user
- Extremely low wear through force reductions through lever mechanism
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- Including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



1/2" 3/4" 1"

	4-point Drive	Nm	Division Nm	Lbf-ft	Division lbf-ft	Lk mm	Height mm	L1 mm	L2 mm	L3 mm	kg		
516.5104	☑	1/2"	25-120	5,00	18-90	5,0	374	30,0	462,0		1,50	€ 844, <sup>50</sup>	
516.5105	☑	1/2"	25-120	5,00	18-90	5,0	374	30,0	462,0		1,50	€ 858, <sup>50</sup>	
516.5106	☑	1/2"	40-200	5,00	30-150	5,0	463	30,0	551,0		1,40	€ 858, <sup>50</sup>	
516.5107	☑	1/2"	40-200	5,00	30-150	5,0	463	30,0	551,0		1,30	€ 873, <sup>50</sup>	
516.5108	☑	1/2"	60-300	5,00	45-220	5,0	529	30,0	617,0		2,00	€ 954, <sup>50</sup>	
516.5109	☑	1/2"	60-300	5,00	45-220	5,0	529	30,0	617,0		2,00	€ 903, <sup>50</sup>	
516.5112	☑	3/4"	110-550	10,00	80-400	10,0	719	35,0	812,0		2,90	€ 1760, <sup>50</sup>	
516.5113	☑	3/4"	110-550	10,00	80-400	10,0	719	35,0	812,0		2,90	€ 1760, <sup>50</sup>	
516.5114	☑	3/4"	155-760	10,00	115-560	10,0	719	35,0	812,0		3,20	€ 1760, <sup>50</sup>	
516.5115	☑	3/4"	155-760	10,00	115-560	10,0	719	35,0	812,0		3,20	€ 1455, <sup>50</sup>	
516.5118	☑	3/4"	520-1000	10,00	380-730	10,0	1297	35,0	812,0	1413,0	762,0	5,60	€ 2129, <sup>50</sup>
516.5119	☑	3/4"	520-1000	10,00	380-730	10,0	1297	35,0	812,0	1413,0	762,0	5,60	€ 2129, <sup>50</sup>
516.5121	☑	1"	600-1500	25,00			1473	40,0	932,0	1608,0	925,0	10,80	€ 3081, <sup>50</sup>
516.5120	☑	1"	600-1500	25,00			1473	40,0	932,0	1608,0	925,0	10,80	€ 2867, <sup>50</sup>
516.5122	☑	1"	750-2000	50,00			2218	40,0	932,0	2353,0	925,0	11,60	€ 3231, <sup>50</sup>
516.5123	☑	1"	750-2000	50,00			2218	40,0	932,0	2353,0	925,0	11,60	€ 3081, <sup>50</sup>



### ALUTORQUEprecision SOCKET PIPE FOR TORQUE WRENCH

- To reach the high torque values easier with the lever arm extension
- Option and secure connection to the aluminium torque wrench
- To extend the lever arm
- Made from zinc coated steel tube



	Length mm	Application for	kg	
516.5056	400,0	516.5053	2,30	€ 236, <sup>50</sup>
516.5057	745,0	516.5053, 516.5055	3,60	€ 291, <sup>50</sup>
516.5058	762,0	516.5047, 516.5049	0,80	€ 291, <sup>50</sup>

### ALUTORQUEprecision ALUMINIUM EXTENSION PIPE FOR TORQUE WRENCH

- To reach the high torque values easier with the lever arm extension
- Option and secure connection to the aluminium torque wrench
- To extend the lever arm
- With slightly anodised clamping nut
- Made of aluminium



	Length mm	Application for	kg	
516.5059	925,0	516.5051, 516.5053, 516.5055	3,40	€ 369, <sup>50</sup>



# TORQUE

## INDUSTRIAL TORQUE WRENCH

Torque wrench made from fully chromed, slim steel construction for clockwise and counter clockwise movement

**Scale:**  
A double scale having N•m Lbf•in and Lbf•ft divisions that can be read easily, is concealed under the chromed steel pipe which enables particularly accurate adjustment of the desired torque value.

**Handle end:**  
The desired torque can be adjusted and set by simply pulling out and pushing in the rotating assembly.

**Micrometer scale:**  
Very precise adjustments can be made with the help of the white micrometer scale. The easily visible micrometer scale ensures optimal and simplified reading of the micrometer value. Thus, depending on the model, divisions of 5/ 1/ 0,5 N•m or lbf•in / lbf•ft can be adjusted accurately.

Accuracy of  
**±3 %**  
of the scale reading  
Precise reading accuracy for a minimum  
5,000 tightening cycles

**Ratchet head:**  
A highly robust 72-tooth ratchet mechanism for clockwise and counter-clockwise movement is integrated in the polished ratchet head. A robust bearing mechanism in the interior of the wrench ensures the highest level of accuracy and long life. An audible and palpable signal indicates automatically that the desired torque value has been achieved.

**Steel handle:**  
The new light, durable and ergonomic steel handle ensures simple and secure operation without any wear due to its fluting.

**Serial number:**  
A permanent and unique serial number is applied on all torque wrenches, which provides unique product identification.

**Corrosion:**  
The slim, robust and resistant fully chromed steel body is ideal for use in industry.



DIN EN ISO 6789






## INDUSTRIAL TORQUE WRENCH WITH REVERSIBLE RATCHET HEAD

- Release accuracy:  $\pm 3\%$  tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- Use is almost all industrial production areas
- For controlled fastening in clockwise and counter clockwise directions
- Double-scale Nm and lbf-ft and/or lbf-in division
- including a micrometre scale in Nm divisions and lbf-ft and/or lbf-in for precise and fine adjustment
- Clearly audible and noticeable torque release sign
- With ejection mechanism on the ratchet head
- Setting the torque securely by turning the handle
- Secure locking function within the handle
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



1/4" 3/8" 1/2" 3/4" 1"

	4-point Drive	Working range Nm	Tooth	Division Nm	Lbf-in	Lbf-ft	Division lbf-in	Division lbf-ft	D mm	L mm	k <sub>0</sub>	
516.5150	1/4"	1-6	64	0,05	11.1-50.9		0,4		26,0	210,0	0,51	€ 187, <sup>50</sup>
516.5151	1/4"	3-15	64	0,10	31-128		0,9		26,0	210,0	0,51	€ 187, <sup>50</sup>
516.5152	1/4"	5-25	64	0,20	53-212		1,8		26,0	248,0	0,33	€ 200, <sup>50</sup>
516.5153	3/8"	10-60	32	0,50		9.2-42.4		0,4	36,5	370,0	1,26	€ 266, <sup>50</sup>
516.5154	3/8"	20-100	32	0,50		16.6-71.9		0,4	36,5	433,0	1,02	€ 266, <sup>50</sup>
516.5155	1/2"	40-200	32	1,00		33-144		0,7	43,5	530,0	1,65	€ 266, <sup>50</sup>
516.5156	1/2"	60-340	32	2,00		52-243		1,5	43,5	610,0	1,80	€ 302, <sup>50</sup>
516.5157	3/4"	100-600	24	5,00		92-424		7,4	63,5	1050,0	4,97	€ 630, <sup>50</sup>
516.5158	3/4"	150-800	24	5,00		129-572		7,4	63,5	1240,0	6,05	€ 921, <sup>50</sup>
516.5159	3/4"	200-1000	24	5,00		166-719		7,4	63,5	1240,0	6,05	€ 921, <sup>50</sup>
516.5160	1"	300-1500	24	10,00		258-1070		14,7	70,0	1850,0	10,51	€ 1453, <sup>50</sup>





## INDUSTRIAL TORQUE WRENCH WITH PLUG-IN TOOL HOLDER

- Release accuracy:  $\pm 3\%$  tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- Use is almost all industrial production areas
- For controlled fastening in clockwise and counter clockwise directions
- Double-scale Nm and lbf-ft and/or lbf-in division
- including a micrometre scale in Nm divisions and lbf-ft and/or lbf-in for precise and fine adjustment
- Clearly audible and noticeable torque release sign
- Setting the torque securely by turning the handle
- Secure locking function within the handle
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- With lock connector for 9x12 and/or 14x18 plug-in tools
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



9x12 mm 14x18 mm

	Drive in mm	Working range Nm	Division Nm	Lbf-in	Lbf-ft	Division lbf-in	Division lbf-ft	L mm	Lk mm	Sk mm	k <sub>0</sub>	
516.5063	9x12	1-6	0,05	11.1-50.9		0,4		197,0	183	17,5	0,46	€ 236, <sup>50</sup>
516.5061	9x12	3-15	0,10	31-128		0,4		197,0	183	17,5	0,26	€ 236, <sup>50</sup>
516.5062	9x12	5-25	0,20	53-212		0,4		227,0	213	17,5	0,30	€ 236, <sup>50</sup>
516.5064	9x12	10-60	0,50		9.2-42.4		0,4	340,0	373	17,5	1,30	€ 302, <sup>50</sup>
516.5065	9x12	20-100	0,50		16.6-71.9		0,4	403,0	373	17,5	1,30	€ 302, <sup>50</sup>
516.5066	14x18	10-60	0,50		9.2-42.4		0,4	362,0	402,5	25,0	1,30	€ 302, <sup>50</sup>
516.5067	14x18	20-100	0,50		16.6-71.9		0,4	425,0	402,5	25,0	1,30	€ 302, <sup>50</sup>
516.5068	14x18	40-200	1,00		33-144		0,7	503,0	474	25,0	1,45	€ 302, <sup>50</sup>
516.5069	14x18	60-340	2,00		52-243		1,5	583,0	554	25,0	1,60	€ 302, <sup>50</sup>





# TORQUE

## TORQUE WRENCH WITH CLOSE-GAP RELEASE

As a result of the close-gap release, the chance of over-tightening is reduced and, in addition, this mechanism enhances the accuracy when fastening the screw. A palpable and acoustic snap indicates that the desired torque value has been achieved - in addition the mechanism resets automatically to the initial position.

**Adjustment:**  
Easy and accurate torque adjustment by means of special winding knob in the handle.

**CLOCKWISE FASTENING** / **COUNTER CLOCKWISE FASTENING**

**Accuracy of  $\pm 4\%$  of the scale reading**  
Precise reading accuracy for a minimum 5,000 tightening cycles

**Four-fold scale:**  
Micrometer dual scale in Nm and lbf•ft divisions

**Ratchet head:**  
Using an insert-type box wrench enables controlled fastening in clockwise and counter clockwise directions

**Handle:**  
Ergonomic handle designed for comfortable use

**Corrosion:**  
Durable protection against corrosion using robust steel with a matt finish chrome-plated surface

**Serial number:**  
A permanent and unique serial number is applied on all torque wrenches, which provides unique product identification.

**Signal:**  
An audible and palpable snap indicates that the desired torque has been achieved



### TORQUE WRENCH WITH CLOSE GAP RELEASE

- Actuation accuracy:  $\pm 4\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Four fold scale in Nm, Kg•fm, lbf•in and lbf•ft divisions for precise adjustment
- An audible and palpable signal when the desired torque value is achieved
- Torque setting is easy by pulling out, adjusting and pushing in the winder in the handle
- Secure locking possibility
- Ergonomic handle designed for comfortable use
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



1/4" 3/8" 1/2" 3/4" 1"

	4-point Drive	Nm	Lbf-ft	Division Nm	Division lbf•ft	L mm	kg	€
516.3510	3/8"	2.5-11	2 - 8	0,50	0,5	300,0	0,56	291, <sup>90</sup>
516.3515	3/8"	5-33	4 - 24	1,00	1,0	405,0	0,69	291, <sup>90</sup>
516.3520	3/8"	12-68	10 - 50	2,00	2,0	480,0	1,00	302, <sup>90</sup>
516.3525	1/2"	12-68	10 - 50	2,00	2,0	480,0	1,00	302, <sup>90</sup>
516.3530	1/2"	25-150	20 - 110	5,00	2,0	575,0	1,70	327, <sup>90</sup>

	4-point Drive	Nm	Lbf-ft	Division Nm	Division lbf•ft	L mm	kg	€
516.3535	1/2"	50-250	40 - 180	10,00	5,0	605,0	2,30	381, <sup>90</sup>
516.3540	1/2"	70-350	50 - 260	10,00	10,0	815,0	3,00	436, <sup>90</sup>
516.3545	3/4"	140-800	120 - 580	20,00	20,0	935,0	6,50	1048, <sup>90</sup>
516.3550	1"	200-1000	150 - 750	25,00	25,0	1030,0	9,70	1337, <sup>90</sup>
516.3555	1"	500-2000	350 - 1500	50,00	50,0	1400,0	18,00	2674, <sup>90</sup>

\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## PRECISION TORQUE TESTING INSTRUMENT WITH DIAL INDICATOR



Accuracy of  
**±4 %**  
of the scale reading  
Precise reading accuracy for a  
minimum 5,000 tightening cycles

**Adjustment:**  
Fast adjustment is possible using the  
integrated opening without dismantling  
the wrench



**Handle:**  
Ergonomic handle  
designed for  
comfortable use

**Signal:**  
The wrenches 516.3655 and 516.3660 have  
optical and acoustic signals when the desired  
torque is reached, which enable the use of  
the wrench even in loud and dark places  
having poor visibility



**Serial number:**  
A permanent and unique  
serial number is applied on  
all torque wrenches, which  
provides unique product  
identification.

**Ratchet head:**  
Fixed box wrench for controlled  
fastening in clockwise and counter  
clockwise directions.


**Corrosion:**  
Durable protection against  
corrosion using robust  
steel with a chrome-plated  
surface



**Dual scale with magnifying glass:**  
Dual scale with magnifying glass in Nm and  
lbf•ft divisions for precise adjustment and  
clear selection. The dial gauge has one drag  
indicator and one main pointer. It is easy to  
read off the scale due to the clear design.



### ERROR-FREE OPERATION:



Using the torsion bar principle, and in  
contrast to conventional torque wrenches, it  
is possible to grip the torque wrench in any  
position, either using both hands or with an  
extension bar.  
Any shift in the value is ruled out thanks to  
the direct measurement at the wrench  
head.

### DIAL TORQUE WRENCH WITH A DRAG INDICATOR

- Display accuracy: ±4 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5,000 tightening cycles
- For controlled display in a clockwise and counter clockwise direction
- Display type torque wrench with dial indicator and drag indicator
- Double scale in Nm and lbf•ft divisions for precise adjustment
- Large vision panel for precise adjustment
- Ergonomic designed handle provides secure transmission of the torque
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



1/4" 3/8" 1/2" 3/4" 1"

	4-point Drive	Nm	Ln-lb	Lbf-ft	Division Nm	Division in•lb	Division lbf•ft	L mm	Signal	kg	
516.3610	1/4"	0,7-3,5	6-30		0,10	1,0		270,0	-	0,73	€ 532, <sup>90</sup>
516.3615	1/4"	1,8-9	15-75		0,20	1,0		270,0	-	0,73	€ 563, <sup>90</sup>
516.3625	3/8"	3,6-18	30-150		0,50	2,0		270,0	-	0,73	€ 563, <sup>90</sup>
516.3625	3/8"	6-30	50-250		0,50	5,0		270,0	-	0,73	€ 563, <sup>90</sup>
516.3630	3/8"	14-70	10-50	2,00	1,0		270,0	-	0,73	€ 641, <sup>90</sup>	
516.3635	1/2"	50-250	34-170	5,00	5,0		560,0	-	1,40	€ 641, <sup>90</sup>	

	4-point Drive	Nm	Ln-lb	Lbf-ft	Division Nm	Division in•lb	Division lbf•ft	L mm	Signal	kg	
516.3640	1/2"	70-350	50-250	10,00	10,00		560,0	-	1,40	€ 684, <sup>90</sup>	
516.3645	3/4"	96-480	70-350	10,00	10,00		675,0	-	3,20	€ 1019, <sup>90</sup>	
516.3650	3/4"	160-800	120-600	25,00	10,00		1180,0	-	4,50	€ 1337, <sup>90</sup>	
516.3655	1"	280-1400	200-1000	25,00	20,00		1970,0	+	9,00	€ 2407, <sup>90</sup>	
516.3660	1"	560-2800	400-2000	50,00	40,00		3200,0	+	21,00	€ 4312, <sup>90</sup>	

\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## PUSH-FIT TOOLS - ACCESSORIES

We have a diverse range of plug-in tools within our range:

- Open
- Ring
- Ratchet
- Torx®
- Push-fit square mount
- Bit holder

In case our range does not have what you need, we would be pleased to manufacture push-fit tools based on your specifications.



### INFO:



In case our range does not have what you need, we would be pleased to manufacture push-fit tools based on your specifications.

### CAUTION:

The maximum torque loads of the push-fit tools are in line with DIN 899 and can be less than the maximum torque of the tool used.

## CALCULATION OF CORRECTED DISPLAY AND SET VALUES



	Drive in mm	Nm	Lbf-ft	Division Nm	L mm	Lk mm	Sk mm	⊖
516.1612	9x12	5-25	0,8 - 18	0,10	280,0	245,0	17,5	300
516.1622	9x12	10-50	4 - 37	0,25	335,0	295,0	17,5	450
516.1632	9x12	20-100	8 - 75	0,50	375,0	335,0	17,5	600
516.1642	9x12	40-200	15 - 150	1,00	465,0	425,0	17,5	850
516.1652	14x18	40-200	15 - 150	1,00	470,0	435,0	25,0	900
516.1672	14x18	60-320	45 - 236	1,00	565,0	530,0	25,0	1200

	Drive in mm	Spanner width mm	S mm	B mm	H mm	⊖
516.2213	14x18	13	25,0	30,0	7,0	120
516.2214	14x18	14	25,0	35,0	8,0	120
516.2215	14x18	15	25,0	38,0	9,0	125
516.2216	14x18	16	25,0	38,0	10,0	130
516.2217	14x18	17	25,0	42,0	10,0	130
516.2218	14x18	18	25,0	42,0	11,0	155
516.2219	14x18	19	25,0	50,0	11,0	160
516.2221	14x18	21	25,0	50,0	12,0	170
516.2222	14x18	22	27,5°	53,0	13,0	180
516.2224	14x18	24	30,0°	60,0	13,0	185
516.2226	14x18	26	30,0°	60,0	14,0	210
516.2227	14x18	27	30,0°	66,0	14,0	220
516.2229	14x18	29	30,0°	66,0	14,0	239
516.2230	14x18	30	30,0°	66,0	14,0	246
516.2232	14x18	32	32,5°	66,0	15,0	265
516.2234	14x18	34	32,5°	74,0	15,0	275
516.2236	14x18	36	32,5°	74,0	15,0	285
516.2238	14x18	38	32,5°	82,0	15,0	307
516.2241	14x18	41	32,5°	82,0	15,0	307

Example: 516.2232 + 516.1672

Desired torque = 230 Nm

$$X_w = \frac{P_d + L_k}{L_k - S_k + S} = \frac{230 \text{ N}\cdot\text{m} + 530 \text{ mm}}{530 \text{ mm} - 25 \text{ mm} + 32,5 \text{ mm}} = \frac{121900}{537,5} = 226,8 \text{ N}\cdot\text{m}$$

Corrected set value: **226,8 N·m**

\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## PUSH FIT TOOLS

### CAUTION:


The maximum torque loads of the push-fit tools are in line with DIN 899 and can be less than the maximum torque of the tool used.

### ERGOTORQUE®plus UNIVERSAL WRENCH WITHOUT TORQUE FUNCTION - WITH RETANGULAR TOOL HOLDER

- Ideal for loosening jammed screw connections
- Can tighten without any torque restraint
- Made of solid material
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools




9x12 mm 14x18 mm



	Drive in mm	L mm	D mm	Height mm	Weight	Price
516.4890	9x12	405,0	26,0	20,0	872	€ 46, <sup>50</sup>
516.4895	14x18	635,0	28,0	26,0	1350	€ 66, <sup>50</sup>

### PUSH FIT FLARED WRENCH

- With a locking pin
- Chrome plated




9x12 mm

	Drive in mm	Spanner width mm	S mm	B mm	Height mm	Weight	Price
516.2107	9x12	7	17,5	22,0	5,0	35	€ 12, <sup>90</sup>
516.2108	9x12	8	17,5	22,0	5,0	35	€ 21, <sup>50</sup>
516.2109	9x12	9	17,5	26,0	5,5	35	€ 12, <sup>90</sup>
516.2110	9x12	10	17,5	26,0	5,5	35	€ 18, <sup>50</sup>
516.2111	9x12	11	17,5	26,0	5,5	35	€ 18, <sup>50</sup>
516.2112	9x12	12	17,5	30,0	7,0	35	€ 18, <sup>50</sup>
516.2113	9x12	13	17,5	30,0	7,0	35	€ 18, <sup>50</sup>
516.2114	9x12	14	17,5	35,0	8,0	40	€ 21, <sup>50</sup>
516.2115	9x12	15	17,5	35,0	8,0	40	€ 21, <sup>50</sup>
516.2116	9x12	16	20,0*	38,0	8,5	45	€ 21, <sup>50</sup>
516.2117	9x12	17	20,0*	38,0	8,5	50	€ 21, <sup>50</sup>
516.2118	9x12	18	20,0*	42,0	9,0	60	€ 21, <sup>50</sup>
516.2119	9x12	19	20,0*	42,0	9,0	60	€ 21, <sup>50</sup>

### PUSH FIT RING SPANNER (BOX WRENCH)

- With a locking pin
- Chrome plated




9x12 mm

	Drive in mm	Spanner width mm	S mm	B mm	Height mm	Weight	Price
516.2307	9x12	7	17,5	13,0	8,0	30	€ 18, <sup>50</sup>
516.2308	9x12	8	17,5	14,2	8,0	30	€ 18, <sup>50</sup>
516.2310	9x12	10	17,5	17,2	9,0	30	€ 18, <sup>50</sup>
516.2311	9x12	11	17,5	18,5	9,0	30	€ 18, <sup>50</sup>
516.2312	9x12	12	17,5	20,0	12,0	35	€ 18, <sup>50</sup>
516.2313	9x12	13	17,5	21,5	12,0	35	€ 18, <sup>50</sup>
516.2314	9x12	14	17,5	23,0	12,0	40	€ 18, <sup>50</sup>
516.2315	9x12	15	17,5	24,2	12,0	40	€ 18, <sup>50</sup>
516.2316	9x12	16	17,5	25,7	13,0	40	€ 18, <sup>50</sup>
516.2317	9x12	17	17,5	27,2	13,0	40	€ 18, <sup>50</sup>
516.2318	9x12	18	17,5	28,5	13,0	40	€ 18, <sup>50</sup>
516.2319	9x12	19	17,5	30,3	13,0	40	€ 18, <sup>50</sup>
516.2321	9x12	21	17,5	33,0	15,0	50	€ 24, <sup>90</sup>
516.2322	9x12	22	17,5	34,5	15,0	50	€ 24, <sup>90</sup>

### OPEN PUSH FIT RING SPANNER (BOX WRENCH)

- With a locking pin
- Chrome plated



9x12 mm


	Drive in mm	Spanner width mm	S mm	B mm	Height mm	Weight	Price
516.2510	9x12	10	17,5	21,0	4,0	40	€ 21, <sup>50</sup>
516.2511	9x12	11	17,5	22,5	4,0	40	€ 21, <sup>50</sup>
516.2512	9x12	12	17,5	23,7	4,0	40	€ 21, <sup>50</sup>
516.2513	9x12	13	17,5	25,2	4,0	40	€ 21, <sup>50</sup>
516.2514	9x12	14	17,5	27,0	5,0	40	€ 21, <sup>50</sup>
516.2517	9x12	17	17,5	31,5	6,5	40	€ 21, <sup>50</sup>
516.2518	9x12	18	17,5	33,0	6,5	40	€ 21, <sup>50</sup>
516.2519	9x12	19	17,5	34,5	6,5	40	€ 21, <sup>50</sup>
516.2522	9x12	22	20,0*	39,0	6,5	40	€ 21, <sup>50</sup>

\* Please note the changed values on the torque wrench!



## TORX-E PUSH FIT RING SPANNER (BOX WRENCH)

- With a locking pin
- Chrome plated




9x12 mm

	Drive in mm	Spanner width	S mm	B mm	Height mm		
516.3006	9x12	E 6	17,5	13,0	8,0	40	€ 18, <sup>50</sup>
516.3008	9x12	E 8	17,5	14,2	8,0	45	€ 18, <sup>50</sup>
516.3010	9x12	E 10	17,5	17,2	9,0	50	€ 18, <sup>50</sup>
516.3012	9x12	E 12	17,5	18,5	9,0	50	€ 18, <sup>50</sup>
516.3014	9x12	E 14	17,5	21,5	10,0	60	€ 18, <sup>50</sup>

## PUSH FIT BIT HOLDER

- With a locking pin
- Chrome plated




5/16" 1/4" 9x12 mm

	Drive in mm	Internal 6 point drive	S mm	B mm	Height mm		
516.2005	9x12	1/4"	17,5	14,0	10,0	47	€ 16, <sup>50</sup>
516.2010	9x12	5/16"	17,5	16,0	12,5	47	€ 18, <sup>50</sup>

## PUSH FIT FINE TOOTHED REVERSIBLE RATCHET HEAD

- With a locking pin
- Fine toothed
- With release feature
- Chrome plated




1/4" 3/8" 1/2" 9x12 mm

	Drive in mm	4-point Drive	S mm	B mm	Height mm		
516.2614	9x12	1/4"	17,5	27,0	25,0	75	€ 29, <sup>90</sup>
516.2638	9x12	3/8"	17,5	35,0	35,0	152	€ 36, <sup>50</sup>
516.2612	9x12	1/2"	17,5	43,0	40,0	228	€ 39, <sup>50</sup>

## PUSH FIT JAW WRENCH

- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- With a locking pin
- Chrome plated



9x12 mm 14x18 mm

	Drive in mm	Square drive in mm	S mm	B mm	Height mm		
516.2040	9x12	14 x 18	30,5*	31,0	26,0	120	€ 34, <sup>50</sup>
516.2050	14x18	9 x 12	27,0*	28,0	21,0	120	€ 34, <sup>50</sup>

## PUSH FIT SQUARE MOUNT

- With a locking pin
- Chrome plated




1/4" 3/8" 1/2" 9x12 mm

	Drive in mm	4-point Drive	S mm	B mm	Height mm		
516.2814	9x12	1/4"	17,5	20,0	14,0	70	€ 21, <sup>50</sup>
516.2838	9x12	3/8"	17,5	20,0	14,0	76	€ 21, <sup>50</sup>
516.2812	9x12	1/2"	17,5	20,0	14,0	80	€ 21, <sup>50</sup>

## PUSH FIT WELD ON HEAD

- With a locking pin
- Burnished



9x12 mm 14x18 mm


	Drive in mm	Weld dimension mm	S mm	B mm	Height mm		
516.2060	9x12	8 x 14	14,5*	14,0	14,5	47	€ 24, <sup>50</sup>
516.2070	14x18	11 x 25	12,0*	25,0	21,5	100	€ 27, <sup>50</sup>

\* Please note the changed values on the torque wrench!



## PUSH FIT FLARED WRENCH

- With a locking pin
- Chrome plated

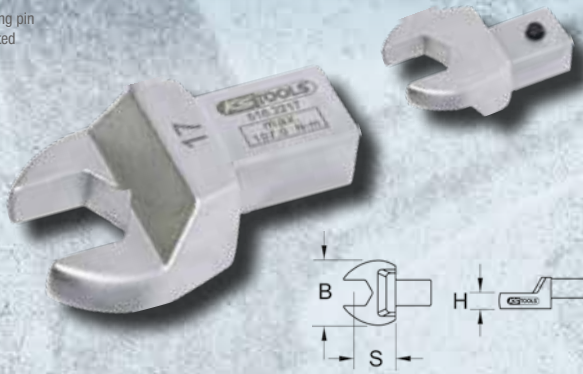


14x18 mm

	Drive in mm	Spanner width mm	S mm	B mm	Height mm	Weight g	Price
516.2213	14x18	13	25,0	30,0	7,0	120	€ 21, <sup>50</sup>
516.2214	14x18	14	25,0	35,0	8,0	120	€ 21, <sup>50</sup>
516.2215	14x18	15	25,0	35,0	8,0	120	€ 21, <sup>50</sup>
516.2216	14x18	16	25,0	38,0	9,0	125	€ 21, <sup>50</sup>
516.2217	14x18	17	25,0	38,0	9,0	130	€ 21, <sup>50</sup>
516.2218	14x18	18	25,0	42,0	10,0	130	€ 24, <sup>90</sup>
516.2219	14x18	19	25,0	42,0	10,0	130	€ 24, <sup>90</sup>
516.2221	14x18	21	25,0	50,0	11,0	155	€ 24, <sup>90</sup>
516.2222	14x18	22	25,0	50,0	11,0	160	€ 24, <sup>90</sup>
516.2224	14x18	24	27,5*	53,0	12,0	170	€ 29, <sup>90</sup>
516.2226	14x18	26	30,0*	60,0	13,0	180	€ 29, <sup>90</sup>
516.2227	14x18	27	30,0*	60,0	13,0	185	€ 29, <sup>90</sup>
516.2229	14x18	29	30,0*	66,0	14,0	210	€ 29, <sup>90</sup>
516.2230	14x18	30	30,0*	66,0	14,0	220	€ 29, <sup>90</sup>
516.2232	14x18	32	32,5*	66,0	14,0	239	€ 29, <sup>90</sup>
516.2234	14x18	34	32,5*	66,0	14,0	246	€ 29, <sup>90</sup>
516.2236	14x18	36	32,5*	74,0	15,0	265	€ 36, <sup>50</sup>
516.2238	14x18	38	32,5*	74,0	15,0	275	€ 36, <sup>50</sup>
516.2241	14x18	41	32,5*	82,0	15,0	307	€ 29, <sup>90</sup>

## PUSH FIT RING SPANNER (BOX WRENCH)

- With a locking pin
- Chrome plated

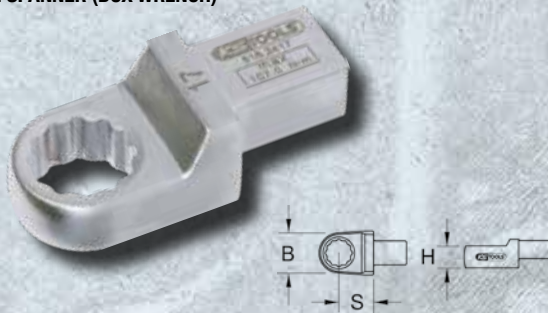


14x18 mm

	Drive in mm	Spanner width mm	S mm	B mm	Height mm	Weight g	Price
516.2413	14x18	13	25,0	21,5	11,0	120	€ 21, <sup>50</sup>
516.2414	14x18	14	25,0	23,0	11,0	120	€ 21, <sup>50</sup>
516.2415	14x18	15	25,0	24,2	11,0	115	€ 21, <sup>50</sup>
516.2416	14x18	16	25,0	25,7	12,0	125	€ 21, <sup>50</sup>
516.2417	14x18	17	25,0	27,2	12,0	125	€ 21, <sup>50</sup>
516.2418	14x18	18	25,0	28,5	12,0	125	€ 21, <sup>50</sup>
516.2419	14x18	19	25,0	30,5	12,0	125	€ 24, <sup>90</sup>
516.2421	14x18	21	25,0	33,0	15,0	140	€ 24, <sup>90</sup>
516.2422	14x18	22	25,0	34,5	15,0	140	€ 24, <sup>90</sup>
516.2424	14x18	24	25,0	37,5	15,0	140	€ 24, <sup>90</sup>
516.2427	14x18	27	25,0	41,5	17,0	150	€ 29, <sup>90</sup>
516.2430	14x18	30	25,0	45,0	19,0	160	€ 29, <sup>90</sup>
516.2432	14x18	32	25,0	47,5	19,0	165	€ 29, <sup>90</sup>
516.2434	14x18	34	28,0*	50,5	19,0	195	€ 39, <sup>50</sup>
516.2436	14x18	36	28,0*	53,0	19,0	195	€ 39, <sup>50</sup>
516.2441	14x18	41	30,0*	59,0	20,0	225	€ 39, <sup>50</sup>

## TORX-E PUSH FIT RING SPANNER (BOX WRENCH)

- With a locking pin
- Chrome plated

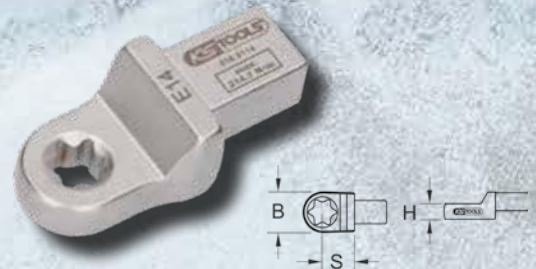

14x18 mm

	Drive in mm	Spanner width	S mm	B mm	Height mm	Weight g	Price
516.3114	14x18	E 14	25,0	22,5	11,0	130	€ 18, <sup>50</sup>
516.3118	14x18	E 18	25,0	24,0	11,0	135	€ 21, <sup>50</sup>
516.3120	14x18	E 20	25,0	29,0	13,0	150	€ 21, <sup>50</sup>
516.3124	14x18	E 24	25,0	30,5	13,0	150	€ 29, <sup>90</sup>

## PUSH FIT FINE TOOTHED REVERSIBLE RATCHET HEAD

- With a locking pin
- Fine toothed
- With release feature
- Chrome plated




1/2" 3/4" 14x18 mm

	Drive in mm	4-point Drive	S mm	B mm	Height mm	Weight g	Price
516.2712	14x18	1/2"	25,0	43,0	43,0	260	€ 36, <sup>50</sup>
516.2734	14x18	3/4"	25,0	70,0	60,0	795	€ 79, <sup>90</sup>

## PUSH FIT SQUARE MOUNT

- With a locking pin
- Chrome plated

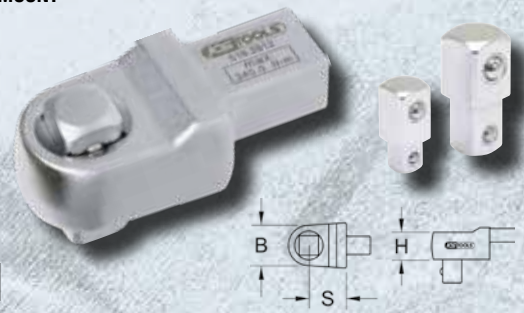


1/2" 3/4" 14x18 mm

	Drive in mm	4-point Drive	S mm	B mm	Height mm	Weight g	Price
516.2912	14x18	1/2"	25,0	27,0	18,0	210	€ 21, <sup>50</sup>
516.2934	14x18	3/4"	25,0	40,0	25,0	400	€ 27, <sup>90</sup>

## PUSH FIT BIT HOLDER

- With a locking pin
- Chrome plated

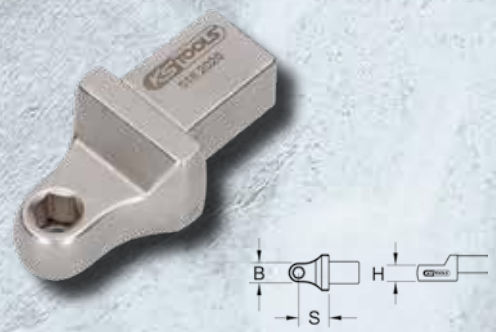

5/16" 14x18 mm

	Drive in mm	Internal 6 point drive	S mm	B mm	Height mm	Weight g	Price
516.2020	14x18	5/16"	25,0	16,0	12,5	115	€ 18, <sup>50</sup>


\* Please note the changed values on the torque wrench!



## VDE TORQUE WRENCH

### FIXED TORQUE WRENCH WITH PROTECTIVE INSULATION

- Insulated handle to IEC 60900
- Actuation accuracy:  $\pm 4\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- An audible and palpable signal when the desired torque value is achieved
- Without scale - with a fixed adjustable value
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



3/8" 1/2"


	4-point Drive	Nm	A mm	L mm		kg	€
117.3922	3/8"	5-35	78,0	210,0		420	393, <sup>90</sup>
117.1001	1/2"	5-35	78,0	250,0		420	470, <sup>90</sup>



# VDE 1000V

### MINI TORQUE WRENCH WITH PROTECTIVE INSULATION AND REVERSIBLE RATCHET HEAD

- Insulated handle to IEC 60900
- For working environment of voltages AC 1000 V and DC 1500 V
- Release accuracy:  $\pm 4\%$  tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- An audible and palpable signal when the desired torque value is achieved
- Exact gearing 30 teeth ratchet mechanism
- Ergonomic designed handle provides secure transmission of the torque
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



1/4" 3/8" 1/2"

	4-point Drive	Nm	D mm	Height mm	L mm		kg	€
117.1400	1/4"	2-10	40,0	41,0	200,0		400	652, <sup>90</sup>
117.1402	1/4"	5-25	40,0	41,0	200,0		420	652, <sup>90</sup>
117.1184	3/8"	5-25	40,0	42,0	200,0		440	577, <sup>90</sup>
117.1185	1/2"	5-25	40,0	42,0	200,0		440	722, <sup>90</sup>

### TORQUE WRENCH WITH PROTECTIVE INSULATION AND REVERSIBLE RATCHET HEAD

- Insulated handle to IEC 60900
- For working environment of voltages AC 1000 V and DC 1500 V
- Release accuracy:  $\pm 4\%$  tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Scale in Nm divisions for precise adjustment
- Large vision panel for precise adjustment
- An audible and palpable signal when the desired torque value is achieved
- Exact gearing 30 teeth ratchet mechanism
- Torque setting is quick and easy using the locking knob in the handle end
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



3/8" 1/2"


	4-point Drive	Nm	Height mm	L mm		kg	€
117.3805	3/8"	5-25	51,0	280,0		0,92	631, <sup>90</sup>
117.3810	3/8"	5-50	51,0	370,0		1,07	652, <sup>90</sup>
117.1301	1/2"	5-25	61,0	280,0		0,93	758, <sup>90</sup>
117.1300	1/2"	5-50	61,0	370,0		1,10	729, <sup>90</sup>
117.1302	1/2"	20-100	61,0	460,0		1,20	743, <sup>90</sup>
117.1303	1/2"	40-220	61,0	530,0		1,30	813, <sup>90</sup>

\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023



## TORQUE CONVERTOR

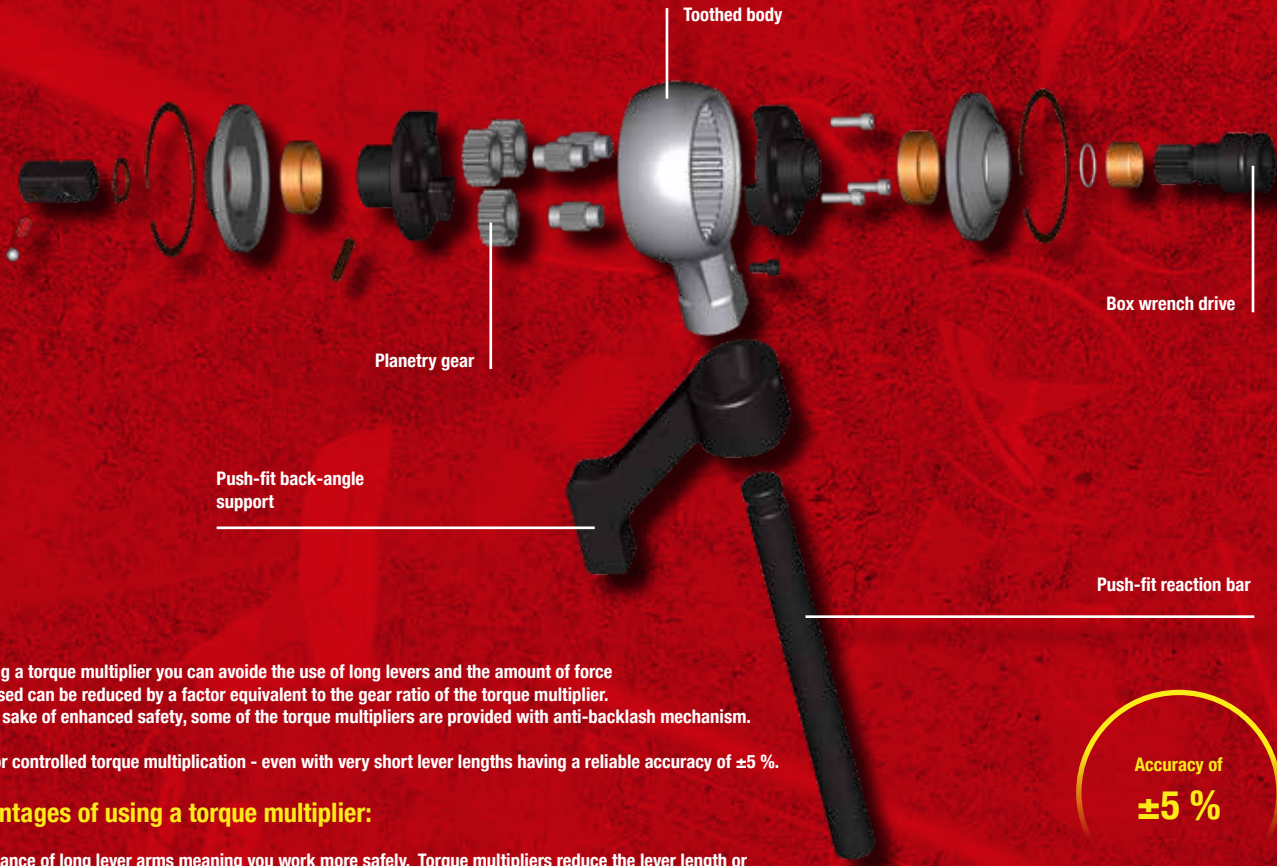

By using a torque multiplier you can avoid the use of long levers and the amount of force to be used can be reduced by a factor equivalent to the gear ratio of the torque multiplier. For the sake of enhanced safety, some of the torque multipliers are provided with anti-backlash mechanism.

Ideal for controlled torque multiplication - even with very short lever lengths having a reliable accuracy of  $\pm 5\%$ .

### Advantages of using a torque multiplier:

- Avoidance of long lever arms meaning you work more safely. Torque multipliers reduce the lever length or the force required by the user by a certain factor.
- The use of a long lever arm may not be possible owing to limitations on the space available.
- The torque multiplier means the torque is applied more accurately as it is applied continuously and slowly and therefore more accurately.

### UNIVERSAL TORQUE MULTIPLIER

- Robust loosening
- Designed for use with the crank handle supplied
- Integrated support device
- Square drive adaptor to DIN 3120 / ISO 1174
- 1:64 Torque ratio
- 4.000 Nm maximum output torque
- Including crank handle and one extension
- Indispensable as essential equipment on service vehicles
- Ideal for trucks, construction machines and agricultural machines
- Not suited for use with impact wrenches
- In durable plastic storage case


**3**  
pcs



<b>516.1151</b>	1	1 : 64	1"	62,5	4000	8,54	€ 205, <sup>90</sup>

### UNIVERSAL TORQUE MULTIPLIER

- Accuracy:  $\pm 5\%$  Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle regulated fastening with a torque wrench
- Single stage precision planetary gear for both directions
- Two support devices
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- Supplied in a metal storage case



<b>516.3700</b>	1/2"	5 : 1	3/4"	260	1300	110,0	395,0	127,0	8,60	€ 575, <sup>90</sup>
<b>516.3705</b>	3/4"	5 : 1	1"	540	2700	110,0	395,0	127,0	4,40	€ 641, <sup>90</sup>



# TORQUE

## TORQUE CONVERTOR, 1680 NM


- High accuracy:  $\pm 5\%$  Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing
- With straight strut
- Housing with angle scale ring
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



**→ 1.680 Nm**

1/2" 3/4"

	□	○	■	Nm	Nm	D mm	L mm	H mm	kg	
516.3740	1/2	6:1	3/4"	280	1680	100,0	128,0	106,0	4,90	€ 1048, <sup>99</sup>



## TORQUE CONVERTOR, 2700 NM


- High accuracy:  $\pm 5\%$  Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing
- With adjustable angular strut
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



**→ 2.700 Nm**

3/4" 1"

	□	○	■	Nm	Nm	D mm	L mm	H mm	kg	
516.3745	3/4	5,4:1	1"	500	2700	115,0	201,0	126,0	6,34	€ 1337, <sup>99</sup>



## TORQUE CONVERTOR, 3500 NM


- High accuracy:  $\pm 5\%$  Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing
- Moving strut with 1" socket mounting
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



**→ 3.500 Nm**

3/4" 1"

	□	○	■	Nm	Nm	D mm	L mm	H mm	kg	
516.3750	3/4	4,5:1	1"	770	3500	108,0	264,0	130,0	7,30	€ 2246, <sup>99</sup>



\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023




## TORQUE CONVERTOR, 4500 NM

- High accuracy:  $\pm 5\%$  Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing
- With straight strut
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



**→ 4.500 Nm**

1/2" 1.1/2"



	□	○	■	↺ Nm	↻ Nm	D mm	L mm	H mm	kg	€
516.3755	1/2	20:1	1.1/2"	225	4500	120,0	312,0	204,8	8,30	€ 2910, <sup>50</sup>


## TORQUE CONVERTOR, 6000 NM

- High accuracy:  $\pm 5\%$  Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing with backstop
- With adjustable strut
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



**→ 6.000 Nm**

1/2" 1.1/2"



	□	○	■	↺ Nm	↻ Nm	D mm	L mm	H mm	kg	€
516.3760	1/2	26:1	1.1/2"	230	6000	130,0	328,0	216,3	15,70	€ 5510, <sup>50</sup>


## TORQUE CONVERTOR, 9500 NM

- High accuracy:  $\pm 5\%$  Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing with backstop
- With adjustable strut
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



**→ 9.500 Nm**

1/2" 1.1/2"




	□	○	■	↺ Nm	↻ Nm	D mm	L mm	H mm	kg	€
516.3765	1/2	26:1	1.1/2"	365	9500	184,0	505,0	214,9	30,30	€ 9201, <sup>50</sup>



## TEST EQUIPMENT

### PRECISION TORQUE TESTING INSTRUMENT WITH DIAL INDICATOR AND DRAG INDICATOR



- Display accuracy:  $\pm 6\%$  tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled display in a clockwise and counter clockwise direction
- For testing, measuring, checking and making adjustments
- Display torque testing instrument with drag indicator
- Large vision panel for precise adjustment
- Tool mounting using a three jaw chuck
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards



	Measuring range mm	Measuring range cNm	Division mNm	Division cNm	Chuck Ø mm	L mm	Weight	
516.3310	1-9		0,2		1-6,5	83,0	290	€ 982, <sup>50</sup>
516.3315	2-15		0,2		1-6,5	83,0	290	€ 1176, <sup>90</sup>
516.3320	4-30		0,5		1-6,5	83,0	290	€ 982, <sup>50</sup>
516.3325	5-60		1		1-6,5	83,0	290	€ 982, <sup>50</sup>
516.3330	10-120		2		1-6,5	83,0	290	€ 982, <sup>50</sup>
516.3335	20-240		5		1-6,5	83,0	290	€ 1048, <sup>50</sup>
516.3410		1-15		0,2	1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3415		2-24		0,2	1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3420		4-36		0,5	1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3425		5-60		1,0	1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3430		10-90		2,0	1-8,5	102,0	600	€ 1455, <sup>50</sup>
516.3435		10-150		2,0	1-8,5	102,0	600	€ 1455, <sup>50</sup>

### ELECTRONIC ACCURACY TESTER FOR TORQUE WRENCHES

- High display accuracy:  $+1\%$  tolerance of the scale values,  $\pm 1$  digit
- For checking or adjusting torque wrenches and torque screwdrivers
- For controlled display in a clockwise and counter clockwise direction
- Simple electronic tester with integrated torsion transducer
- Digital scale in Nm divisions for precise adjustment
- Display mode: First Peak (detection of first peak)
- Large LCD display for clear reading of the values
- With automatic reset and automatic shutdown
- Simple and comfortable operating
- Square drive by means of square adaptor
- Individually marked with serial number - unique product identification
- including calibration declaration of conformity according to DIN EN ISO 6789:2017(E) - traceable to national standards
- No main power required – includes 2 x AA 1.5 V LR26 batteries
- Includes reinforcement screw
- In durable plastic storage case

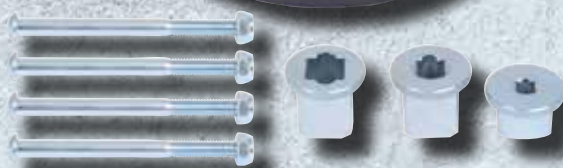

1/4" 3/8" 1/2" 3/4"

	4-point Receiver	Working range Nm	L mm	B mm	Height mm	Weight	
516.0100	1/4"+3/8"+1/2"+3/4"	5 - 500	180,0	130,0	147,0	4,82	€ 460, <sup>50</sup>



\*This is an limited special price offer - only until stocks last.

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023




# PREMIUM PRODUCTS PREMIUM SERVICE



With our  
AFTERSALES **SERVICE** CENTER  
competent support -  
even after purchase.



Quality assurance in accordance with DIN EN ISO  
9001:2015 and controlled safety at the highest stage!



Your Local Distributor



KS Tools Werkzeuge - Maschinen GmbH

Seligenstädter Grund 10 - 12  
D-63150 Heusenstamm

GERMANY

Tel.: +49(0) 61 04 49 74-0  
Fax: +49(0) 61 04 49 74-11  
e-mail: kstools@kstools.de  
www.kstools.com



LL22-06EN\_EUR

\*This is an limited special price offer - only until stocks last.  
All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores. Print mistakes, errors and technical alterations excepted. Prices valid up to 30.09.2023